

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04H 15/00</b>	<b>A2</b>	(11) International Publication Number: <b>WO 98/26529</b> (43) International Publication Date: 18 June 1998 (18.06.98)
--	-----------	---

(21) International Application Number: PCT/US97/21643

(22) International Filing Date: 24 November 1997 (24.11.97)

(30) Priority Data: 08/763,750 11 December 1996 (11.12.96) US

(71) Applicant: NIELSEN MEDIA RESEARCH, INC. [US/US];  
299 Park Avenue, New York, NY 10171-0074 (US).

(72) Inventors: LU, Daozheng; 1903 Dunloe Circle, Dunedin, FL 34698 (US). HARKNESS, David, H.; 17 Heatherstone Lane, Wilton, CT 06897 (US). BHATIA, Manish; 95 Riverview Court, Secaucus, NJ 07094 (US). SAMSON, Jerome; 3400 Gulf Boulevard #101, Belleair Beach, FL 33786 (US). FEININGER, William, A.; 1656 Allens Ridge Drive North, Palm Harbor, FL 34683 (US).

(74) Agent: JOIKE, Trevor, B.; Marshall, O'Toole, Gerstein, Murray &amp; Borun, 6300 Sears Tower, 233 South Wacker Drive, Chicago, IL 60606-6400 (US).

(81) Designated States: AU, BR, CA, CN, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

**Published***Without international search report and to be republished upon receipt of that report.*

(54) Title: INTERACTIVE SERVICE DEVICE METERING SYSTEMS

## (57) Abstract

A metering system meters usage of on-line and off-line services by way of interactive service devices. Interactive service devices may include personal computers and non-personal computers. Non-personal computers may include network computers, gaming devices, Internet televisions, Internet telephones, and the like. The on-line service usage may include Internet usage such as which home pages, advertisements, and other Internet resources are accessed by a user. The off-line service usage may include application program usage such as which application programs are executed by a user.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## INTERACTIVE SERVICE DEVICE METERING SYSTEMS

Technical Field of the Invention

5       The present invention is directed to metering systems for metering usage of on-line services such as the Internet, off-line services such as software application programs, and other services.

Background of the Invention

10       The Internet and its multimedia component, the Web, have become an integral part of the way in which content is delivered to end users. For example, newspapers, magazines, and television and cable networks have Web sites that are increasingly being used to deliver content.

15       This content delivered by on-line service providers is accessed by end users by way of on-line service access devices. The on-line service access device most often in use currently is the personal computer. The personal computer may or may not share a monitor with a television. However, non-personal-computer on-line service access devices are being developed that will enable  
20       end users to connect to the Internet. These non-personal-computer on-line service access devices include, for

example, (i) a network computer (having a basic RAM, little or no hard disk capacity, a modem, a monitor, and a keyboard; for more permanent storage, a network computer may rent storage at a remote location), (ii) a gaming device (such as those used with or without televisions in order to play video games), (iii) an Internet television (for example, a television equipped with an external Web box, or an Internet enabled television which is a television internally equipped with Internet access capability), (iv) an Internet telephone (a telephone that is Internet enabled), (v) an Internet hand held calculator (a hand held calculator that is Internet enabled, and (vi) the like. All such on-line service access devices are referred to herein as interactive service devices (ISDs).

Many people desire to determine the amount and nature of interest in the content provided to end users. For example, advertisers who use the Internet to deliver ads to end users may find it useful to know the number of times that their ads are accessed by end users, the length of time that the end users spend at the ads, and the demographics relating to the end users who access their ads. Such information may indicate the target audience for, and popularity of, their products and/or

services. This information may also be useful in determining the success of certain advertising campaigns. Online service providers may also desire to determine the amount and nature of interest in the content that they provide.

Certain web sites currently meter access to the content that they provide. However, metering Internet usage at a web site provides little opportunity to non-intrusively determine the demographics of the end users who are accessing the web site. Moreover, although the web site determines the number of times that its content is accessed, the web site does not also determine the number of times that other web sites are visited. Accordingly, the web site cannot effectively extrapolate to the entire population or even to the segment of the population accessing content of competing web sites.

It is also known to meter Internet usage through the use of software traps which are stored on the hard drives of personal computers located in statistically selected end user facilities (e.g., households, businesses, and the like). These software traps log each access to the Internet. However, software traps have a number of disadvantages. For example, software traps require all instructions to flow through the software

traps. This requirement adds delay in the processing of these instructions. Accordingly, software traps slow down computer processing and can be, therefore, annoying to computer end users. Moreover, current software traps store the Internet usage data that they log on floppy disks which must be then mailed or otherwise non-electronically sent to a central facility where the information is downloaded and processed along with Internet usage data from other end users in order to generate Internet usage reports. This manner of providing Internet usage data from statistically selected end user facilities to a central facility for report generation places added burdens on the end users and is slow. Furthermore, software traps are not currently able to meter other interactive service devices such as Internet televisions, gaming devices, network computers, and the like.

The present invention is intended to solve one or more of the above-noted problems.

Summary of the Invention

According to one aspect of the present invention, a metering system comprises data acquiring means and data communicating means. The data acquiring means  
5 acquires usage data from one of a variety of interactive service devices. The data communicating means communicates the usage data to a remote facility.

According to another aspect of the present invention, a metering system comprises data acquiring  
10 means and data storage means. The data acquiring means acquires usage data from one of a variety of interactive service devices. The data storage means stores the usage data.

According to yet another aspect of the present  
15 invention, a metering system comprises passive data acquiring means and data communicating means. The passive data acquiring means passively acquires usage data from an interactive service device. The data communicating means communicates the usage data to a remote facility.

According to still another aspect of the present  
20 invention, a metering system comprises data acquiring means and user identifying means. The data acquiring means acquires usage data relating to a user's use of an interactive service device. The user identifying means

identifies the user independently of a password and/or a logon identification.

According to a further aspect of the present invention, a metering system comprises data acquiring means and data transmitting means. The data acquiring means acquires usage data from an interactive service device. The data transmitting means electronically transmits the usage data to a remote facility.

According to yet a further aspect of the present invention, a metering system comprises data acquiring means and data storing means. The data acquiring means acquires usage data from an interactive service device. The data acquiring means is downloaded from a remote facility. The data storing means stores the data acquiring means and the usage data.

According to still a further aspect of the present invention, a metering system comprises communication line tapping means and passive data acquiring means. The communication line tapping means taps into a communication line coupled to an interactive service device. The passive data acquiring means is coupled to the communication line tapping means and passively acquires usage data from communications on the communication line.



According to another aspect of the present invention, a metering system comprises data acquiring means and data storing means. The data acquiring means acquires usage data from an interactive service device. The data acquiring means includes code detecting means for detecting an identification code in content being processed by the interactive service device. The data storing means stores the usage data and the identification code.

According to yet another aspect of the present invention, a metering system comprises passive data acquiring means and data communicating means. The passive data acquiring means passively acquires usage data from a personal computer. The data communicating means electronically communicates the usage data to a remote facility.

According to still another aspect of the present invention, a metering system comprises communication line tapping means, passive data acquiring means, data storing means, and data communicating means. The communication line tapping means taps into a communication line coupled to a non-personal-computer. The passive data acquiring means is coupled to the communication line tapping means and passively acquires usage data from the

non-personal-computer. The data storing means stores the usage data acquired by the passive data acquiring means. The data communicating means communicates the usage data to a remote facility.

5           According to a further aspect of the present invention, a metering system comprises passive data acquiring means, data storing means, and data communicating means. The passive data acquiring means passively acquires usage data from an Internet television. The data  
10 storing means stores the usage data acquired by the passive data acquiring means. The data communicating means communicates the usage data to a remote facility.

          According to yet a further aspect of the present invention, a metering system comprises usage data  
15 acquiring means, television ratings data acquiring means, and data communicating means. The usage data acquiring means passively acquires usage data from an interactive service device. The television ratings data acquiring means acquires ratings data relating to the tuning of  
20 television signals by a television. The data communicating means communicates the usage data and the ratings data to a remote facility.

          According to another aspect of the present invention, a metering system comprises data acquiring

means and data storing means. The data acquiring means  
acquires usage data from a video signal received by an  
interactive service device. The data acquiring means  
employs pattern matching to acquire the usage data. The  
5 data storing means stores the usage data.

According to yet another aspect of the present  
invention, a method of collecting and integrating usage  
data from a plurality of facilities comprises the follow-  
ing steps: a) collecting first usage data from a plural-  
10 ity of end users; b) collecting second usage data from a  
plurality of content providers; and d) integrating the  
first and second usage data.

According to still another aspect of the pres-  
ent invention, a metering system comprises passive data  
15 acquiring means and data storing means. The passive data  
acquiring means passively acquires usage data from an  
interactive service device. The data storing means  
stores the usage data.

Brief Description of the Drawings

These and other features and advantages of the present invention will become more apparent from a detailed consideration of the invention when taken in conjunction with the drawings in which:

Figure 1 is a block diagram of a metering system according to the present invention;

Figure 2 is a block diagram of a metering system according to the present invention and implements a passive communication listener (PCL) for passively acquiring usage data relating to an interactive service device;

Figure 3 illustrates a downloadable resident software passive communication listener which may be used for the passive communication listener shown in Figure 2;

Figure 4 is a flow chart representing one embodiment of the downloadable resident software passive communication listener of Figure 3;

Figure 5 is a flow chart representing another embodiment of the downloadable resident software passive communication listener of Figure 3;

Figure 6 is a block diagram of a metering system according to the present invention having a passive

communication listener for passively acquiring usage data relating to a personal computer;

Figure 7 is a block diagram of a metering system according to the present invention having a passive communication listener for passively acquiring usage data relating to a personal computer that shares a monitor with a television;

Figure 8 is a block diagram of a metering system according to the present invention having a passive communication listener for passively acquiring usage data relating to a non-personal-computer interactive service device;

Figure 9 is a flow chart representing one embodiment of the passive communication listener of Figure 8;

Figure 10 is one embodiment of a more detailed representation of one of the blocks of Figure 9;

Figure 11 is another embodiment of a more detailed representation of one of the blocks of Figure 9;

Figure 12 is a block diagram of a metering system according to the present invention having a passive communication listener for passively acquiring usage data relating to a non-personal-computer interactive service device in the form of a network computer;

Figure 13 is a block diagram of a metering system according to the present invention having a passive communication listener for passively acquiring usage data relating to an Internet television in the form of a television having an external web box;

Figure 14 is a block diagram of a metering system according to the present invention having a passive communication listener for passively acquiring usage data relating to an Internet television in the form of a web enabled television;

Figure 15 is a block diagram of a metering system according to the present invention having a passive communication listener for passively acquiring usage data relating to an Internet television which receives on-line communications in a television video signal;

Figure 16 is a flow chart representing a program which may be executed by a passive communication listeners in order to acquire usage data from content transmitted in television video signals; and,

Figure 17 is a block diagram illustrating a usage data collection system according to the present invention.

#### Detailed Description

As shown in Figure 1, a metering system 10, which may be located in a statistically selected end user facility, includes a data acquisition module 12 for acquiring usage data relative to an interactive service device 14. As discussed above, an interactive service device may be a personal computer, a personal computer sharing a monitor with a video display device such as a television, a network computer, a gaming device, an Internet television, an Internet telephone, an Internet hand held calculator, and the like. An Internet television is a video display device or monitor which is enabled to communicate over the Internet. An Internet television, for example, may be a television having a web box, an internally enabled Internet television, or a television having a cable converter or modem with Internet communication capability. The Internet includes the worldwide web and/or all similar webs (such as a local web in an intranet environment) or networks or extensions thereof. Usage data as used herein means any and all data relating to a user's use of such on-line resources as the Internet, of such off-line resources as software programs (for example, application programs), such other resources as intranets, and/or the like.

5       The data acquisition module 12, therefore, may  
acquire on-line usage data such as data relating to an  
end user's use of on-line services. Such on-line serv-  
ices may include, for example, the Internet, an intranet,  
the World Wide Web, E-mail, various provider groups, and  
the like. The data acquisition module 12 may also ac-  
quire off-line usage data, such as data relating to an  
end user's use of off-line services. Off-line services  
may include, for example, application programs such as  
10   word processing programs, spread sheet programs, and the  
like, and are typically stored on the interactive service  
device 14. As disclosed below, the data acquisition  
module 12 may further acquire television program ratings  
data. The television program ratings data may be ac-  
15   quired from conventional televisions, from Internet tele-  
visions, from a personal computer having a television  
tuner, and the like.

20       The data acquisition module 12 acquires usage  
data with respect to the interactive service device 14,  
and transfers that usage data to a data collection module  
16 which stores the acquired usage data for immediate  
(real time) or later (non-real time) communication over a  
communication medium 18 to a data processing module 20.  
The communication medium 18 may be plain old telephone



lines (POTS). The communication medium 18 may alternatively be (i) a cable, (ii) an integrated services digital network (ISDN), (iii) an xDSL such as a digital subscriber line (DSL), an asymmetrical digital subscriber line (ADSL), or a rate adapted digital subscriber line (RADSL), or (iv) any other type of medium (e.g., over-the-air channels) which support communication between the data collection module 16 and the data processing module 20. Any of these communication media may be arranged to permit the data collection module 16 to transmit its data and information to the data processing module 20 during normal phone calls, during on-line service (e.g., Internet) communications, and the like.

A user identification and verification module 22 identifies and verifies the end user who is using the interactive service device 14, and supplies the resulting identification and verification information to the data collection module 16. The user identification and verification module 22 may identify and verify the end user upon each end user logon, or the user identification and verification module 22 may identify and verify the end user periodically. The advantage of periodically identifying and verifying the end user is that the identity of any other end users who may operate the interactive ser-

vice device using the original end user's logon ID and password will be identified and verified. For example, one or more other end users may operate the interactive service device using the original end user's logon ID and password when the original end user logs onto an interactive service device and then leaves the interactive service device without logging off. During the original end user's absence, one or more other end users may operate the interactive service device, thus using the original end user's logon ID and password.

The user identification and verification module 22 may implement, for example, biometrics recognition or personal characteristic recognition. As an example of biometrics recognition, the user identification and verification module 22 may be of the sort disclosed in U.S. Patent No. 5,550,928. Such a system includes a camera for acquiring a current image of the end user of the interactive service device 14, and identifies the end user by comparing this current image to reference images stored in memory. However, the system disclosed in that patent is complicated by the fact that the individuals to be recognized by such a system may be anywhere in the field of vision of the camera. On the other hand, the end user to be recognized according to the present inven-

tion is typically at a fixed distance, in a fixed location, and in a substantially uniform orientation with respect to the interactive service device 14.

Consequently, there may be no need for the scaling, tracking, application of multiple different face recognition techniques, and the like disclosed in the aforementioned '928 patent. Other examples of biometrics recognition include body shape recognition which may be implemented in accordance with the teachings of the aforementioned '928 patent, body temperature recognition as may be implemented through use of an infrared temperature detector, fingerprint recognition as may be implemented through the use of a fingerprint reader, and the like.

As an example of personal characteristic recognition, the user identification and verification module 22 may identify and verify an end user through the use of keystroke recognition as may be implemented by a keystroke monitor that monitors an end user's keystroke style (e.g., fast, slow, sporadic).

Instead of, or in addition to, implementing periodic identification and verification, the user identification and verification module 22 may determine when an end user has left the interactive service device. For example, an infrared temperature detector may be used to

determine when an end user leaves the interactive service device and when an end user again appears at the interactive service device. The user identification and verification module 22 may then re-identify and re-verify the end user or require the end user to enter relevant identification and verification information. Alternatively, periods of inactivity exceeding a predetermined amount of time may cause the user identification and verification module 22 to re-identify and re-verify the end user or require the end user to enter relevant identification and verification information.

The data acquisition module 12 may take the form of the passive communication listeners described below. The data collection module 16 may have a storage device and a modem. The storage device stores the user identification and verification information supplied by the user identification and verification module 22 and the usage data acquired by the data acquisition module 12. The modem immediately or periodically transmits this information and data to the data processing module 20.

The data processing module 20 may be a computer at a central facility. Other metering systems, similar to the metering system 10, may be located in a plurality of other statistically selected end user facilities. The

data processing module 20 accumulates the usage data and  
identification and verification information from the  
metering system 10 and from these other metering systems  
in order to generate reports based upon the usage data  
and the identification and verification information as  
projected over an entire population or relevant segments  
of the entire population. These reports may report the  
extent of usage of various on-line and off-line services  
covered by the usage data and may disclose the nature of  
the users of these on-line and off-line services.

The metering system 10, and the other metering  
systems which communicate identification and verification  
information and usage data to the data processing module  
20, need not meter interactive service devices of the  
same type. Metering systems for metering several differ-  
ent types of interactive service devices in accordance  
with the present invention are disclosed below by way of  
example. In order to accommodate the metering of differ-  
ent types of interactive service devices, the data acqui-  
sition module 12 is tailored according to each type of  
interactive service device which is encountered in the  
statistically selected end user facilities.

Thus, as will become evident from the descrip-  
tion below, one of the advantages of the present inven-

tion is that the present invention may be used to meter a variety of different interactive service devices. Accordingly, the data acquisition module 12 may take one form if the interactive service device 14 is a personal computer, may take another form if the interactive service device 14 is a network computer, may take still another form if the interactive service device 14 is an Internet television, and so on.

The data acquisition device 12 may advantageously be passive with respect to the operation of the interactive service device being metered. Accordingly, unlike a software trap, the data acquisition module 12 in its passive form is transparent to, and does not noticeably slow down the operation of, the interactive service device being metered. Thus, as shown in Figure 2, a metering system 24 includes a passive communication listener (PCL) 26 as one type of data acquisition module. The passive communication listener 26 listens to the communications to and from an interactive service device 28 in order to acquire usage data with regard to an end user's use of the interactive service device 28. The passive communication listener 26 may also monitor the end user's use of application programs by way of the interactive service device 28 in order to acquire addi-

tional usage data. The passive communication listener 26 transfers the usage data which it acquires to a data storage and communication module 30. The data storage and communication module 30 also receives user identification and verification information from a user identification and verification module 32. The data storage and communication module 30 immediately or periodically transmits the user identification and verification information and the usage data to a data processing module 34.

As in the case of the data acquisition module 12 shown in Figure 1, the passive communication listener 26 acquires on-line and off-line usage data and can also acquire, if desired, television program ratings data. The television program ratings data may be acquired from conventional televisions, from Internet televisions, from a personal computer having a television tuner, and the like. One of the principal advantages of the passive communication listener 26 is that the passive communication listener 26 is transparent to an end user's use of an interactive service device. The passive communication listeners of the present invention also require fewer upgrades because they principally monitor communication protocols and because communication protocols change infrequently. Electronic communication of the usage

data, of the identification and verification information, and of television program ratings data to the data processing module 34 saves operating costs because mailed-in floppy disks do not have to be read.

5           The data storage and communication module 30 may be similar to the data collection module 16, the user identification and verification module 32 may be similar to the user identification and verification module 22, the communication medium 36 may be similar to the communication medium 18, and the data processing module 34 may  
10           be similar to the data processing module 20.

          As illustrated in Figure 3, a passive communication listener according to the present invention may take the form of a resident software passive communication listener 40. For example, the resident software  
15           passive communication listener 40 may be an agent (or add-on) in a web browser, or it may be an insertable resident routine in a computer's operating system or in a web browser. As illustrated in Figure 3, the resident  
20           software passive communication listener 40 is arranged (i) to monitor on-line service usage, without any noticeable delay, by monitoring the information which flows from an operating system 42 to a communication device driver 44 and which can indicate access to on-line ser-



vices, (ii) to monitor off-line service usage by monitoring information which flows from an operating system 42 to application programs 46, and which indicates access to the application programs, (iii) to monitor keyboard clicks, mouse clicks, touch-screen touches, remote control signals, remote keyboard signals, remote mouse signals, and the like which are processed by an operating system 42 and which indicate scrolling and the like. The resident software passive communication listener 40 further monitors communication between the communication device driver 44 and the operating system 42 in order to acquire usage data relating to the on-line content delivered by on-line service providers or web sites. The resident software passive communication listener 40 stores the acquired usage data in a memory such as a log file 48. The usage data logged in the log file 48 may be periodically or immediately transmitted to a central facility.

The resident software passive communication listener 40 is a software tap operating similarly to the wire tapping passive communication listeners described below. The resident software passive communication listener 40 may be installed in an operating system, and creates several possible processing threads. For exam-

ple, when a line (such as a serial communication line or a direct LAN line) is being used, the resident software passive communication listener 40 copies but does not immediately process the transmitted data. During periods when the CPU of the computer on which the resident software passive communication listener 40 is resident is not being heavily used, the resident software passive communication listener 40 interrogates the copied transmissions and logs items of interest (such as URL's, HTML tags, and the like). This procedure is different from a software trap because a software trap processes the transmissions in real time, whereas the resident software passive communication listener 40 processes the transmissions at near real time and, thus, does not slow down the transmissions in a way that is perceived by the user. Also, the resident software passive communication listener 40 does not alter the data streams or process flow of the socket-level transmissions.

The resident software passive communication listener 40 is an event driven program. As shown in Figure 4, the resident software passive communication listener 40 includes a block 62 which detects initialization of a modem and/or a local area network (LAN) that may indicate the beginning of an access to an on-line or

off-line service. If the computer on which the resident software passive communication listener 40 is resident is not a LAN-based computer, then the block 62 may be arranged to detect initialization of the computer itself.

5           Upon such initialization, a block 64 then monitors the modem and LAN (or other local computer) activity which indicates on-line and off-line service events. For example, the block 64 may monitor access to a web browser or the like which indicates the beginning of an access to  
10           an on-line service provider or web site. Also, the block 64 may monitor access to an application program or the like which indicates the beginning of an access to an off-line service. A block 66 determines whether the activity monitored by the block 64 is on-line or off-line  
15           activity. If the activity is on-line activity, a block 68 detects the communication protocol. For example, the block 68 may determine whether an on-line communication has an HTTP header indicating the beginning of an Internet communication.

20           A block 70 determines whether the detected communication protocol is an Internet protocol. If so, a block 72 uses the connection between the operating system 42 and the communication device driver 44 in order to read the header information of the Internet communica-

tion. For example, the block 72 reads the header information for the HTTP designation, reads the HTML's header, the title, tags, cookies, addresses, and so on that may be contained in the Internet communication. The block 72 causes this data to be stored in the log file 48.

If the block 70 determines that the communication protocol detected by the block 68 is not an Internet protocol (such that the protocol relates to another on-line service), a block 74 reads the header information, as well as any other pertinent information that is desired, from the detected communication and causes this information to be stored in the log file 48.

If the block 66 determines that the activity monitored by the block 64 is not on-line activity, a block 76 monitors the usage of one or more of the application programs 46. For example, the block 76 may determine which application programs are accessed and may monitor keyboard clicks, mouse clicks, touch-screen touches, remote control signals, remote keyboard signals, remote mouse signals, and the like in order to determine the extent of usage of the accessed application programs. A block 78 logs this application program related usage data in the log file 48. The usage data logged by the block 78 may include an identification of the application

program being accessed by the end user of the computer in which the resident software passive communication listener 40 is resident, the length of time that the end user is actively using the accessed application program, and any other information which is desirable. The block 76 may also be executed as a result of a timer event to periodically monitor application events.

After the block 72 reads the header information for the HTTP designation, reads the HTML's header, the title, tags, cookies, addresses, and so on of an Internet communication, after the block 74 reads the header information, as well as any other pertinent information that is desired, from the detected communication of another on-line communication, or after the block 78 logs application program related usage data in the log file 48, program flow returns to the block 64.

With respect to the metering of on-line service usage, the resident software passive communication listener 40 as embodied in Figure 4 is primarily useful in metering an end user's access to on-line services rather than the end user's use of the content that is delivered as a result of the access. If metering an end user's use of the delivered content is desirable, a program 90, which is shown in Figure 5, may be implemented as a modi-

fication of the resident software passive communication listener 40 shown in Figure 4.

The program 90 replaces the block 72 shown in Figure 4. A block 92 of the program 90 performs the same functions as the block 72. In addition, a block 94 detects the presence of any identification codes which may be embedded in the content delivered to the corresponding interactive service device. For example, these identification codes may be used to identify specific content or portions of content provided by an on-line service. The identification codes may be embedded in the Internet data packets transmitted by the accessed on-line service provider or web site to the accessing interactive service device, in graphics such as computer graphics, in video signals, in audio signals, and the like. The block 94 logs any identification codes which it detects in a log file.

A block 96 determines whether any of the content delivered to the corresponding interactive service device is being scrolled. The block 96 may make this determination by monitoring related keyboard clicks, mouse clicks, touch-screen touches, remote control signals, remote keyboard signals, remote mouse signals, and the like. If the content delivered to the corresponding

interactive service device is being scrolled, a block 98 monitors the scrolling in order to determine which portions of the delivered content are being displayed on the monitor to the end user and how long each portion is in the active display of the monitor. Thus, the provider of the content can make conclusions regarding the extent of end user interest in the content as a whole and also in specific portions of the content. A block 100 logs such scrolling data in the log file.

If the block 94 does not detect scrolling, or after the block 100 logs the scrolling data, program flow returns to the block 64 of Figure 4.

The program 90 can also replace the block 74 shown in Figure 4. In this case, the block 92 would be modified to read and store relevant data from headers of other on-line service providers or web sites.

The resident software passive communication listener 40 may be downloadable over one of the communication media described above to the computer on which the resident software passive communication listener 40 is resident. Accordingly, the resident software passive communication listener 40 may be changed from time to time as communication protocols change, as the need for

particular usage data changes, and/or as the particular interactive service device being monitored changes.

As indicated above, the resident software passive communication listener 40 may advantageously be used in a metering system which meters a personal computer. An example of such a metering system is shown in Figure 6 as a metering system 110. The metering system 110 includes a passive communication listener 112, which may be in the form of the resident software passive communication listener 40 and which acquires usage data from a personal computer 114. This usage data is transferred by the passive communication listener 112 to a data storage and communication module 116. (The data storage and communication module 116 may also acquire television program ratings data.) The data storage and communication module 116 stores the usage data from the passive communication listener 112 and also stores identification and verification information from a user identification and verification module 118. Immediately or periodically, the data storage and communication module 116 communicates the user identification and verification information from the user identification and verification module 118 and the usage data from the passive communication



listener 112 over a communication medium 120 to a data processor 122 which may be located at a central facility.

The data storage and communication module 116 may be similar to the data storage and communication module 30, the user identification and verification module 118 may be similar to the user identification and verification module 32, the communication medium 120 may be similar to the communication medium 36, and the data processing module 122 may be similar to the data processing module 34.

As shown in Figure 7, a metering system 130 may be arranged to meter a personal computer which shares a monitor with a television. The metering system 130 includes a passive communication listener 132 which is arranged to accumulate usage data from a personal computer 134 that shares a monitor with a television 136. As in the case of the passive communication listener 112, the passive control listener 132 may be software similar to the program shown in Figures 4 and/or 5 and may be resident on the personal computer 134. Accordingly, the passive communication listener 132 accumulates usage data and transfers the usage data to a data storage and communication module 138. The data storage and communication module 138 stores the usage data and also stores user

identification and verification information supplied by a user identification and verification module 140. The data storage and communication module 138 communicates the usage data from the passive communication listener 132 and the user identification and verification information from the user identification and verification module 140 over a communication medium 142 to a data processing module 144.

The metering system 130 shown in Figure 7 may also be used to accumulate television program ratings data. Accordingly, non-intrusive sensors 146 may be located adjacent to a cabinet of the television 136. Alternatively, or in addition to the non-intrusive sensors 146, a non-intrusive sensor 147 may be located adjacent to a cabinet of the television 136. The non-intrusive sensors 146 may sense the video and/or audio signals internal to the cabinet at a point where the video and/or audio signals are characteristic of the programs to which the television 136 is tuned. The sensed video and/or audio signals are supplied to a site unit 148 which acquires the television program ratings data from the video and/or audio signals sensed by the sensors 146. The non-intrusive sensors 146 and the site unit 148 may be similar to the apparatus which is located at the statisti-

cally selected household 12 disclosed in U.S. Patent No. 5,481,294.

5           The non-intrusive sensor 147 may be an infrared sensor and may sense the infrared signals transmitted by a remote control to the television 136. The sensed remote control signals are supplied to the passive communication listener 132 (or alternatively to the site unit 148) which acquires television program ratings data from the remote control signals sensed by the non-intrusive  
10           sensor 147. The non-intrusive sensor 147 and the portion of the passive communication listener 132 (or alternatively the site unit 148) which respond thereto may be similar to the apparatus disclosed in U.S. Patent No. 4,876,736 and/or in U.S. Patent No. 4,972,503.

15           The television program ratings data acquired by the site unit 148 and/or by the passive communication listener 132 may include program identification codes embedded in the television video and/or audio signals, and/or may be signatures characterizing the TV video  
20           and/or audio signals relating to the programs tuned by the television 136.

          The television program ratings data accumulated by the site unit 148 are transferred to a home unit 150 which may also receive television program ratings data

from other site units 148 corresponding to other television  
sions located within the statistically selected end user  
facility in which the metering system 130 is located.  
Periodically, the home unit 150 supplies all of the accu-  
5 mulated television program ratings data to the data processing module 144.

The data processing module 144 generates usage  
reports based upon the usage data acquired by the passive  
communication listener 132 and by the other metering  
10 systems in other statistically selected end user facilities.  
Similarly, the data processing module 144 accumulates the  
television program ratings data from the home unit 150 of the  
metering system 130 and from the other home units of other  
metering systems located in other  
15 statistically selected end user facilities and generates  
television ratings reports therefrom.

The passive communication listeners 112 and 132  
are of the type that are resident on a personal or other  
computer. Instead, a passive communication listener  
20 according to the present invention may be a box or other  
apparatus which is tapped into appropriate communication  
lines or cables that carry on-line communications to and  
from an interactive service device. Alternatively, a  
passive communication listener according to the present

invention may be a box or other apparatus which acquires usage data from signals tapped by a probe non-intrusively coupled to an interactive service device such as an Internet television. This type of passive communication listener is particularly advantageous for those interactive service devices which do not have sufficient memory to store resident software passive communication listeners.

For example, a metering system 160 as illustrated in Figure 8 includes a home unit 161 having a passive communication listener 162 which is coupled by way of a tapping device 164 to a communication medium 166 that may be a phone line or cable and that services a non-personal-computer interactive service device 168. The tapping device 144 may include a sensor similar to the sensor disclosed in U.S. Patent No. 4,972,504 and may also include a modem for receiving and transmitting data on the communication medium 166. The passive communication listener 162 acquires on-line usage data based upon the communications over the communication medium 166 between the non-personal-computer interactive service device 168 and on-line service providers or web sites, and transfers the acquired on-line usage data to a data store 170. As described below, the passive communication

listener 162 may also be arranged to acquire off-line usage data, and to transfer the acquired off-line usage data to the data store 170. The data store 170 stores the usage data from the passive communication listener 162, and also stores user identification and verification information supplied by a user identification and verification module 172. As in the case of Figure 7, the data store 170 may also store television program ratings data from a television metering operations module 174 which receives video and/or audio signals from sensors 176. The data store 170 supplies its usage data, user identification and verification information, and television program ratings data to the modem of the tapping device 164 which transmits the usage data, the user identification and verification information, and the television program ratings data over the communication medium 166 to a central facility.

A non-intrusive sensor 178 may be located adjacent to the non-personal-computer interactive service device 168 and may be an infrared sensor which senses the infrared signals transmitted by a remote control to the non-personal-computer interactive service device 168. The sensed remote control signals are supplied to the passive communication listener 162 which acquires televi-

sion program ratings data therefrom. The non-intrusive sensor 178, and the portion of the passive communication listener 162, which respond thereto may be as described above.

5                   The passive communication listener 162 may have a processor for executing a program 180, which is shown in Figure 9, which may be arranged to meter both on-line and off-line usage, and which is an event driven program. Also, although the non-personal-computer interactive  
10                   service device 168 may not have a hard drive, it may have sufficient internal memory to permit it to execute application programs. Such application programs, for example, can either be loaded from a floppy disk or can be down-  
15                   loaded to the non-personal-computer interactive service device 168 over the communication medium 166 from an on-line service provider or web site. Accordingly, the program 180 may be arranged to meter off-line usage in addition to on-line usage.

20                   It should be noted, however, that the passive communication listener 162 relies on the tapping device 164 to tap into on-line service communications in order to acquire on-line usage data. Such an arrangement is ill equipped to acquire off-line usage data. However, an off-line usage acquisition program may be temporarily

loaded into a RAM or other temporary memory of the non-personal-computer interactive service device 168 either by the home unit 161 or by a remote facility. Alternatively, the off-line usage acquisition program may be more permanently loaded into an EEPROM or other read only memory of the non-personal-computer interactive service device 168. Accordingly, not only access to application programs may be metered, but also scrolling and other activity with respect to the execution of application programs may be metered.

The program 180 includes a block 182 which, upon the occurrence of a triggering user event or timer event, detects data packets being communicated on the communication medium 166 between the non-personal-computer interactive service device 168 and an on-line service provider or web site. For example, the block 182 may determine whether each data packet has a header indicating a communication to or from an on-line service provider or web site. A block 184 determines whether the detected data packet includes a header indicating a Transmission Control Protocol/Internet Protocol (TCP/IP). If so, a block 186 logs relevant data from the Internet data packet (such as relevant URLs and content) in a log file



188. This data may be similar to the data detected by the block 72.

If the detected data packet does not include a TCP/IP header, a block 190 determines whether the data packet relates to on-line activity other than Internet activity. If so, a block 192 logs relevant data from the non-Internet on-line activity in the log file 188. If the data packet does not relate to any on-line activity, a block 194 logs off-line activities in the log file 188. As taught above, the block 194 may be stored in temporary or permanent memory of the metered interactive service device. A block 196 immediately or periodically transfers the usage data logged in the log file 188 to the modem of the tapping device 144 for communication over the communication medium 166. After the block 186 logs relevant data from the Internet on-line activity in the log file 188, or after the block 192 logs relevant data from the non-Internet on-line activity in the log file 188, or after the block 194 logs off-line activities in the log file 188, the program 180 waits for the next event.

A first embodiment of the block 186 is shown in Figure 10. This first embodiment is a routine 186' which includes a block 200 that reads information related to

Internet activities. For example, the block 200 reads the header information for the HTTP designation, reads the HTML's header, the title, tags, cookies, addresses, and so on that may be contained in an Internet communication on the communication medium 160. As shown in Figure 9, this activity is logged in the log file 188. After the block 200 reads and stores information related to Internet activities, the program 180 waits for the next event.

A routine similar to the routine 186 can also be used for the block 192 shown in Figure 9. In this case, however, the block 200 would be modified to read and store relevant data from headers in data packets transmitted to and received from other on-line service providers or web sites. The block 194 may be similarly configured.

A second embodiment of the block 186 is shown in Figure 11 as a routine 186''. The routine 186'' includes a block 210 which detects any identification codes which may be embedded in the on-line communications between the non-personal-computer interactive service device 168 and an on-line service provider or web site over the communication medium 160. A block 212 logs the iden-

tification codes, and any other desired usage data, in a log file.

5 A block 214 monitors scrolling of the on-line service content in order to determine which portions of the delivered content are being displayed to the end user and how long each portion is in the active display of a monitor. Thus, the on-line service provider or web site of the content can make conclusions regarding the extent of end user interest in the content as a whole and also  
10 in specific portions of the content. This scrolling data is logged by a block 216 in a log file.

After the block 212 logs the identification codes, and any other desired usage data, in a log file, or after the block 216 logs the scrolling data in a log  
15 file, the program 180 waits for the next event.

Figure 12 illustrates a metering system 230 which is appropriate where the non-personal-computer interactive service device is a network computer 232. In this case, a home unit 234 may contain a passive communication listener similar to the passive communication  
20 listener 162, a tapping device similar to the tapping device 164, a data store similar to the data store 170, and (optionally) a television metering module and sensors similar to the television metering operations module 174

and the sensors 176. Accordingly, the home unit 234 acquires and stores user identification and verification information supplied by a user identification and verification module 236, usage data based upon on-line and off-line activities supported by the network computer 232, and television program ratings data if desired. The home unit 214 periodically or immediately transmits this user identification and verification information, usage data, and television program ratings data over a communication medium 238 to a data processing module 240 for report generation as described above.

Because the network computer 232 has little or no hard disk, the tapping approach shown in Figure 8 may be used in order to acquire usage data regarding on-line and off-line activities. The passive communication listener of the home unit 234 may implement the program 180 described in connection with Figure 9. That is, the passive communication listener of the home unit 234 may have a processor programmed in accordance with Figures 9 - 11. Also, because the network computer 232 has little or no hard disk, the block 194 may be stored in temporary memory of the metered network computer 232. Code implementing the functions of the block 194 may be loaded into such temporary memory of the metered network computer 232

by the passive communication listener of the home unit 234 or by an on-line service provider or web site. Alternatively, this code may be more permanently loaded into a EEPROM or other read only memory of the network computer 232.

Figures 13-15 illustrate metering systems which may be used when the non-personal-computer interactive service device is an Internet television. In Figure 13, a metering system 250 is particularly useful in the case where the Internet television includes a television 252 and a web box 254. The web box 254 transmits and receives on-line communications over a communication medium 256 and is arranged to control the television 252 so as to display the on-line communications to an end user. A cable box 258 receives television signals and is arranged to control the television 252 so as to display the television signals to an end user. An A/B switch 260 switches the television 252 between the web box 254 and the cable box 258.

A passive communication listener 262 is shown connected both to the communication medium 256 and to an output of the A/B switch 260. The passive communication listener 262 may include a CPU, a RAM, a ROM, and a modem. The passive communication listener 262 may also

include a tapping device for tapping into the communication medium 256. Alternatively, as shown in Figure 13, the passive communication listener 262 may include a tapping device for tapping into the output of the A/B switch 260. The tapping devices may be the same as, or similar to, those described above. Alternatively, the tapping device 164 may instead be a probe mounted on the cabinet of the television 252 in a position to pick up the video that is supplied to the CRT of the television 252. Such a probe is non-intrusive in the sense that opening of the cabinet of the television 252 is not necessary in order to mount the probe. This probe may be of the type disclosed in U.S. Patent Application Serial Number 08/654,306 filed on May 28, 1996.

Accordingly, the passive communication listener 262 may be arranged to acquire appropriate usage data and to transfer that usage data to a site unit 264. The passive communication listener 262 may acquire usage data in a manner similar to that described above in connection with Figures 9 -11 if the passive communication listener 262 is tapped into the communication medium 256. However, the passive communication listener 262 may acquire usage data in a manner similar to that described below in connection with Figure 16 if the passive communication

listener 262 is tapped into the output of the A/B switch 260.

Instead of tapping into either the communication medium 256 or the output of the A/B switch 260, the passive communication listener 262 may be tapped into both the communication medium 256 and the output of the A/B switch 260.

A user identification and verification module 266 acquires user identification and verification information and transfers that information to the site unit 264. The site unit 264 may also receive television video and/or audio signals from sensors 268 in order to derive television program ratings data therefrom as described above. The site unit 264 transfers the usage data, the user identification and verification information, and/or the television program ratings data to a home unit 270 which collects usage data, user identification and verification information, and/or television program ratings data from other metering systems metering other interactive service devices in the end user's facility and which then periodically transmits all such information and data to a data processor module 272. The data processor module 272, in turn, collects usage data, user identification and verification information, and/or television

program ratings data from all other metering systems metering all other interactive service devices in all other statistically selected end user facilities in order to generate suitable reports.

5           The communications between the home unit 270 and the data processing module 272 may use the same communication medium 256 that supports the on-line communications to and from the web box 254. As in the other metering systems described above, the home unit 270 may  
10       transfer its information to the data processing module 272 during internet communications, by way of dedicated telephone calls to the data processing module 272, or the like.

15           A non-intrusive sensor 274 may be located adjacent to the television 252 and may be an infrared sensor which senses the infrared signals transmitted by a remote control to the television 252. The sensed remote control signals are supplied to the site unit 264 which acquires television program ratings data therefrom. The non-in-  
20       trusive sensor 274, and the portion of the site unit 264, which respond thereto may be as described above.

          The Internet television illustrated in Figure 13 includes a television and a web box so that the television is, in effect, externally enabled to support on-



line communications. As shown in Figure 14, a metering system 280 may be used in the case where the television has internal web supporting components so that the television is internally enabled. This type of Internet television is referred to herein as a web enabled television and is shown in Figure 14 as a web enabled television 282.

The metering system 280 includes a passive communication listener 284 which acquires on-line usage data supported by the web enabled television 282. The passive communication listener 284 may receive inputs from an appropriate output jack of the web enabled television 282. Preferably, although not necessarily, this output jack is a video output of the web enabled television 282. If the web enabled television 282 does not have an appropriate output jack for the passive communication listener 284, the passive communication listener 284 instead may be tapped, using the above-described tapping device, into a television signal and on-line communication input 286 of the web enabled television 282 and/or into a communication medium 288 (such as a phone line or cable) which supports on-line communications to and from the web enabled television 282.

The passive communication listener 284 may be similar to the passive communication listener 262 shown in Figure 13. Accordingly, the passive communication listener 284 may acquire usage data in a manner similar to that described above in connection with Figure 9, or the passive communication listener 284 may acquire usage data by executing a program, such as will be described in connection with Figure 16, particularly where content from an on-line service provider or web site is transmitted in the vertical blanking intervals of television signals. The passive communication listener 282 transfers its usage data to a site unit 290 which also receives user identification and verification information from a user identification and verification module 292 and video and/or audio signals from sensors 294. This site unit 290 transfers to a home unit 296 the usage data from the passive communication listener 284, the user identification and verification information from the user identification and verification module 292, and television program ratings data based upon the video and/or audio signals from the sensors 294. The home unit 296 periodically communicates this data and information to a data processing module 298 over the communication medium 288.

A non-intrusive sensor 300 may be located adjacent to the television 282 and may be an infrared sensor which senses the infrared signals transmitted by a remote control to the television 282. The sensed remote control signals are supplied to the site unit 290 which acquires television program ratings data therefrom. The non-intrusive sensor 300, and the portion of the site unit 290, which respond thereto may be as described above.

Figure 15 illustrates a metering system 310 which may be used in connection with an Internet television including a television 312 and a cable or satellite converter 314. The cable or satellite converter 314 converts received television signals for display by the television 312. The metering system 310 includes a passive communication listener 316 which may be coupled by a tapping device to a line between the television 312 and the cable or satellite converter 314 in order to receive the television signals coupled by the cable or satellite converter 314 to the television 312. In this case, on-line communications may be transmitted in the vertical blanking intervals of these television signals, and the passive communication listener 316 may acquire usage data by executing a program, such as will be described in connection with Figure 16.

Alternatively, the passive communication listener 316 may be coupled by a tapping device to a communication medium 318 which is used in those cases where on-line communications of an on-line service provider or web site are supported by a medium other than a television signal medium received by the cable or satellite converter 314. In this case, the passive communication listener 316 may acquire usage data by executing the program shown in Figures 9 - 11.

The passive communication listener 312 acquires the appropriate usage data which it then transfers to a site unit 320. The site unit 320 also receives user identification and verification information from a user identification and verification module 322 and video and/or audio signals from sensors 324. The site unit 320 transfers to a home unit 326 the usage data from the passive communication listener 316, the user identification and verification information from the user identification and verification module 322, and television program ratings data based upon the video and/or audio signals from the sensors 324. The home unit 326 periodically transfers this data and information to a data processing module 328 over the communication medium 318.

A non-intrusive sensor 330 may be located adjacent to the television 312 and may be an infrared sensor which senses the infrared signals transmitted by a remote control to the television 312. The sensed remote control signals are supplied to the site unit 320 which acquires television program ratings data therefrom. The non-intrusive sensor 330, and the portion of the site unit 320, which respond thereto may be as described above.

Figure 16 illustrates a program 340 which may be executed by a passive communication listener in order to log usage data relating to on-line activity transmitted in video frames, such as in vertical blanking intervals of video frames. The program 340 may be resident on an interactive device in any manner described herein so as to acquire on-line usage data. The program 340 includes a block 342 which determines whether a video signal is being received. If a video signal is not being received, the block 342 continues to wait for the reception of a video signal. If a video signal is received, a block 344, which may be in the form of a frame grabber, grabs each video frame of the received video signal. These video frames may be in an NTSC format. A block 346 tests the grabbed video frame in order to determine whether the grabbed video frame contains a data packet having

an on-line service header (such as an internet HTTP header). If not, program flow returns to the block 342.

5 If the grabbed video frame contains a data packet having an on-line service header, a block 348 determines whether an identification code is imbedded in the video frame grabbed by the block 344. In order to make this determination, the block 348 may use pattern matching. If the block 348 determines that an identification code is imbedded in the video frame grabbed by the block 344, a block 350 logs the identification code. If the block 348 determines that an identification code is not imbedded in the video frame grabbed by the block 344, a block 352 implements pattern recognition in order to derive other appropriate usage data related to the content of the on-line service data packets. That is, the block 352 causes the grabbed frame to be sampled in a predetermined manner and matches the pattern of the samples to a reference pattern previously extracted from samples of appropriate portions of the frame. Such an appropriate portion of a frame may include particularly relevant content.

After the block 350 logs an identification code, or after the block 352 implements pattern recognition, a block 354 causes the logged data to be trans-

ferred to a home unit. A block 356 then determines whether the end user has signed off any on-line activities. If not, program flow returns to the block 342. If so, the program 340 exits.

5                   A collection system is shown in Figure 17 and includes a central data collection facility 400 which may be a data processor such as those described above. The central data collection facility 400 collects usage data from a plurality of metering systems 402 located at the facilities of end users. These end users may employ the interactive service devices metered by the metering systems 402 in residences, commercial establishments such as businesses, governmental establishments, or the like. If the end user is at a business, the interactive service device being metered may be a proxy server that serves a local area network.

10                   The facilities in which the metering systems 402 are located may be statistically selected in order to represent the entire population or a segment of the entire population relevant to usage of on-line and off-line services, depending on the intended scope of coverage of the reports which are generated on the basis of the collected usage data.

5       The usage data collected by the central data  
collection facility 400 from the metering systems 402 may  
include the identity of the on-line service providers or  
web sites accessed by end users, the number of times each  
on-line service provider or web site is accessed by end  
users, the amount of time spent at each service provider  
by end users, any identification codes embedded in the  
content delivered by on-line service providers or web  
sites, the identity of the applications programs executed  
10 by end users, the number of times each applications pro-  
grams is executed by end users, the amount of time spent  
in executing each applications programs, inventories of  
application programs stored at an interactive service de-  
vice, any identification codes embedded in the applica-  
15 tion programs executed by metered interactive service  
devices, scrolling of the content delivered by on-line  
service providers or web sites or of application programs  
executed by metered interactive service devices, the  
identity and other demographic information of the end  
20 users, and the like.

The central data collection facility 400 also  
collects usage data from a plurality of on-line service  
providers 404 located at the facilities which are remote  
from the end users 402. The usage data collected by the



central data collection facility 400 from the on-line service providers 404 may include the number of times each on-line service provider is accessed by end users, the amount of time spent at each service provider by end users, the content provided by the on-line service providers, and the like. Data from the on-line service providers 404 may be necessary as a supplement in those cases where transmissions to end users are hard to decode, such as where the data is encrypted. However, it should be noted that identification and verification of end users is impractical when data is collected from the on-line service providers 404.

In addition, the central data collection facility 400 collects usage data from a plurality of web sites 406 located at the facilities which are remote from the end users 402 and the on-line service providers 404. The usage data collected by the central data collection facility 400 from the web sites 406 is easy to meter and may include the number of times each web site is accessed by an end user or an on-line service provider, the amount of time spent at each service provider by end users or on-line service providers, the content provided by the web site to the on-line service providers or web site, and the like. Again, data from the web sites 406 may be

necessary as a supplement in those cases where transmissions to or from end users or on-line service providers are hard to decode, such as where the data is encrypted. However, it should be noted that identification and verification of end users is impractical when data is collected from the web sites 406.

Certain modifications of the present invention have been discussed above. Other modifications will occur to those practicing in the art of the present invention. For example, as described above, usage data is first stored and is then communicated to a remote facility, such as a central facility. Instead of storing the usage data before communicating it to a remote facility, however, the usage data can be communicated in real time, i.e. as soon as it is acquired. For example, the usage data acquirers of the present invention may be arranged to simply echo gets (requests transmitted by an interactive service device for on-line service from an on-line service provider) and receives (on-line service content transmitted by an on-line service provider in response to a request (i.e., a get) from an interactive service device) to a remote facility without storing the usage data. Thus, these usage data acquirers may be arranged to transmit copies of the gets and receives to the remote

facility. For instance, the data acquirers may be arranged to remove the URL from a get just transmitted by an interactive service device to an on-line service provider, substitute the URL of the remote facility for the removed URL, and transmit the result as usage data. This data acquirer may also be arranged to copy a receive transmitted by an on-line service provider in response to a get previously sent by the metered interactive service device, remove the end user's URL from the copy, substitute the URL of the remote facility for the removed URL, and send the result as usage data.

Moreover, the metering systems shown in Figures 13 - 15 have been described above as acquiring usage data relating to on-line communications. If the Internet televisions are capable of executing application programs, the metering systems shown in Figures 13 - 15 may also be arranged to acquire usage data relating to off-line communications.

Furthermore, the passive communication listener 40 is described above as being an agent in a web browser or an insertable resident routine in a computer's operating system or in a web browser. Instead, the passive communication listener 40 may be resident on a hard drive

or in RAM, and the passive communication listener 40 may be downloaded from a remote facility.

5 In addition, because a statistically selected end user facility may contain different interactive service devices, each such different interactive service device may be metered by a corresponding different one of the passive communication listeners described above.

10 Also, according to some aspects of the present invention, the usage data may be collected manually in written diaries or automatically on floppy disks, and the usage data may be transmitted to the central facility by mail, courier, or other delivery manual service. The particular manner in which the usage data is collected and transmitted depends upon the particular end users.  
15 For example, the interactive service devices of some end users may not have modems. Thus, instead of transmitting the usage data electronically, the usage data can be transmitted manually.

20 As described above, television program ratings data may be acquired by detecting identification codes in, and/or extracting signatures from, video and/or audio signals. Instead, television program ratings data may be acquired in more traditional manners such as employed in

people meter systems, diaries, telephone surveys, and the like.

Accordingly, the description of the present invention is to be construed as illustrative only and is for the purpose of teaching those skilled in the art the best mode of carrying out the invention. The details may be varied substantially without departing from the spirit of the invention, and the exclusive use of all modifications which are within the scope of the appended claims is reserved.

WHAT IS CLAIMED IS:

- 1                   1. A metering system comprising:  
2                   data acquiring means for acquiring usage data  
3                   from one of a variety of interactive service devices;  
4                   and,  
5                   data communicating means for communicating the  
6                   usage data to a remote facility.
- 1                   2. The metering system of claim 1 wherein the  
2                   data acquiring means acquires the usage data from a per-  
3                   sonal computer.
- 1                   3. The metering system of claim 1 wherein the  
2                   data acquiring means acquires the usage data from a non-  
3                   personal-computer.
- 1                   4. The metering system of claim 1 wherein the  
2                   data acquiring means acquires off-line usage data.
- 1                   5. The metering system of claim 4 wherein the  
2                   data acquiring means acquires on-line usage data.

1                   6. The metering system of claim 1 wherein the  
2     data acquiring means acquires on-line usage data.

1                   7. The metering system of claim 6 wherein the  
2     data acquiring means acquires the usage data from a per-  
3     sonal computer.

1                   8. The metering system of claim 6 wherein the  
2     data acquiring means acquires the usage data from a non-  
3     personal-computer.

1                   9. The metering system of claim 1 further com-  
2     prising user identifying means for identifying a user  
3     independently of a password and/or a logon identifica-  
4     tion.

1                   10. The metering system of claim 9 wherein the  
2     user identifying means implements biometrics recognition.

1                   11. The metering system of claim 9 wherein the  
2     user identifying means is a personal characteristic de-  
3     tector.

1                   12. The metering system of claim 9 wherein the  
2 data acquiring means acquires on-line usage data.

1                   13. The metering system of claim 1 wherein the  
2 data communicating means communicates the usage data to  
3 the remote facility though an on-line service communica-  
4 tion.

1                   14. The metering system of claim 1 wherein the  
2 data communicating means communicates the usage data in  
3 real time to the remote facility.

1                   15. The metering system of claim 1 wherein the  
2 data communicating means communicates the usage data to  
3 the remote facility by way of a phone call.

1                   16. The metering system of claim 1 wherein the  
2 data communicating means communicates the usage data to  
3 the remote facility by way of cable.



1           17. The metering system of claim 1 wherein the  
2 data acquiring means is at a first statistically selected  
3 facility, wherein the data communicating means is at the  
4 first statistically selected facility, and wherein the  
5 metering system further comprises:

6           a plurality of other data acquiring means for  
7 acquiring usage data from a plurality of other interac-  
8 tive service devices, wherein each of the other data  
9 acquiring means and a corresponding other interactive  
10 service device are located in a corresponding one of a  
11 plurality of other statistically selected facilities;  
12 and,

13           a plurality of other data communicating means  
14 for communicating the usage data stored by the other data  
15 storing means to the remote facility, wherein each of the  
16 other data communicating means is located in a cor-  
17 responding one of the plurality of other statistically  
18 selected facilities.

1           18. A metering system comprising:  
2 data acquiring means for acquiring usage data  
3 from one of a variety of interactive service devices;  
4 and,  
5 data storage means for storing the usage data.

1           19. The metering system of claim 18 wherein  
2           the data acquiring means acquires the usage data from a  
3           personal computer.

1           20. The metering system of claim 18 wherein  
2           the data acquiring means acquires the usage data from a  
3           non-personal-computer.

1           21. The metering system of claim 18 wherein  
2           the data acquiring means acquires off-line usage data.

1           22. The metering system of claim 21 wherein  
2           the data acquiring means acquires on-line usage data.

1           23. The metering system of claim 18 wherein  
2           the data acquiring means acquires on-line usage data.

1           24. The metering system of claim 23 wherein  
2           the data acquiring means acquires the usage data from a  
3           personal computer.

1           25. The metering system of claim 23 wherein  
2           the data acquiring means acquires the usage data from a  
3           non-personal-computer.

1                   26. The metering system of claim 18 further  
2                   comprising user identifying means for identifying a user  
3                   independently of a password and/or a logon identifica-  
4                   tion.

1                   27. The metering system of claim 26 wherein  
2                   the user identifying means implements biometrics recogni-  
3                   tion.

1                   28. The metering system of claim 26 wherein  
2                   the user identifying means is a personal characteristic  
3                   detector.

1                   29. The metering system of claim 26 wherein  
2                   the data acquiring means acquires on-line usage data.

1                   30. The metering system of claim 18 further  
2                   comprising data communicating means for communicating the  
3                   usage data to a remote facility through an on-line ser-  
4                   vice communication.

1                   31. The metering system of claim 18 further  
2                   comprising data communicating means for communicating the  
3                   usage data to a remote facility in real time.

1           32. The metering system of claim 18 further  
2           comprising data communicating means for communicating the  
3           usage data to a remote facility by way of a phone call.

1           33. The metering system of claim 18 further  
2           comprising data communicating means for communicating the  
3           usage data to a remote facility by way of cable.

1           34. The metering system of claim 18 wherein  
2           the data acquiring means is at a first statistically  
3           selected facility, wherein the data storing means is at  
4           the first statistically selected facility, and wherein  
5           the metering system further comprises:

6           a plurality of other data acquiring means for  
7           acquiring usage data from a plurality of other interac-  
8           tive service devices, wherein each of the other data  
9           acquiring means and a corresponding other interactive  
10          service device are located in a corresponding one of a  
11          plurality of other statistically selected facilities;  
12          and,

13          a plurality of other data storing means for  
14          storing the usage data acquired by the other data acquir-  
15          ing means, wherein each of the other data storing means

16 is located in a corresponding one of the plurality of  
17 other statistically selected facilities.

1 35. A metering system comprising:  
2 passive data acquiring means for passively  
3 acquiring usage data from an interactive service device;  
4 and,  
5 data communicating means for communicating the  
6 usage data to a remote facility.

1 36. The metering system of claim 35 wherein  
2 the passive data acquiring means passively acquires the  
3 usage data from a personal computer.

1 37. The metering system of claim 35 wherein  
2 the passive data acquiring means comprises software resi-  
3 dent on a storage device of the passive data acquiring  
4 means.

1 38. The metering system of claim 37 wherein  
2 the software comprises means for monitoring scrolling of  
3 a display and for including data related to the monitored  
4 scrolling in the usage data.

1                   39. The metering system of claim 37 wherein  
2 the data communicating means communicates the usage data  
3 to the remote facility though an on-line service communi-  
4 cation.

1                   40. The metering system of claim 37 wherein  
2 the data communicating means communicates the usage data  
3 to the remote facility in real time to the remote facili-  
4 ty.

1                   41. The metering system of claim 35 wherein  
2 the passive data acquiring means passively acquires the  
3 usage data from a personal computer which is arranged to  
4 share a monitor with a television.

1                   42. The metering system of claim 35 wherein  
2 the passive data acquiring means passively acquires the  
3 usage data from a non-personal-computer.

1                   43. The metering system of claim 35 wherein  
2 the passive data acquiring means is coupled to a communi-  
3 cation input to the interactive service device by way of  
4 a tapping device.

1           44. The metering system of claim 35 wherein  
2 the passive data acquiring means is coupled to a televi-  
3 sion/in-ternet input to the interactive service device.

1           45. The metering system of claim 35 wherein  
2 the passive data acquiring means includes means for grab-  
3 bing video frames.

1           46. The metering system of claim 35 wherein  
2 the passive data acquiring means is coupled to a cable  
3 modem input to the interactive service device.

1           47. The metering system of claim 35 wherein  
2 the passive data acquiring means passively acquires the  
3 usage data from a vertical blanking interval of a video  
4 signal.

1           48. The metering system of claim 35 wherein  
2 the passive data acquiring means passively acquires off-  
3 line usage data.

1           49. The metering system of claim 48 wherein  
2 the passive data acquiring means passively acquires on-  
3 line usage data.

1                   50. The metering system of claim 35 wherein  
2                   the passive data acquiring means passively acquires on-  
3                   line usage data.

1                   51. The metering system of claim 35 further  
2                   comprising user identifying means for identifying a user  
3                   independently of a password and/or a logon identifica-  
4                   tion.

1                   52. The metering system of claim 51 wherein  
2                   the user identifying means implements biometrics recogni-  
3                   tion.

1                   53. The metering system of claim 51 wherein  
2                   the user identifying means is a personal characteristic  
3                   detector.

1                   54. The metering system of claim 35 wherein  
2                   the data communicating means communicates the usage data  
3                   to the remote facility though an on-line service communi-  
4                   cation.

1                   55. The metering system of claim 35 wherein  
2                   the data communicating means communicates the usage data



3 to the remote facility in real time to the remote facili-  
4 ty.

1 56. The metering system of claim 35 wherein  
2 the data communicating means communicates the usage data  
3 to the remote facility by way of a phone call.

1 57. The metering system of claim 35 wherein  
2 the data communicating means communicates the usage data  
3 to the remote facility by way of cable.

1 58. The metering system of claim 35 wherein  
2 the passive data acquiring means is at a first statisti-  
3 cally selected facility, wherein the data communicating  
4 means is at the first statistically selected facility,  
5 and wherein the metering system further comprises:

6 a plurality of other passive data acquiring  
7 means for passively acquiring usage data from a plurality  
8 of other interactive service devices, wherein each of the  
9 other passive data acquiring means and a corresponding  
10 other interactive service device are located in a corre-  
11 sponding one of a plurality of other statistically se-  
12 lected facilities; and,

13           a plurality of other data communicating means  
14       for communicating the usage data acquired by the other  
15       data acquiring means to the remote facility, wherein each  
16       of the other data communicating means is located in a  
17       corresponding one of the plurality of other statistically  
18       selected facilities..

1           59. A metering system comprising:  
2           data acquiring means for acquiring usage data  
3       relating to a user's use of an interactive service de-  
4       vice; and,  
5           user identifying means for identifying the user  
6       independently of a password and/or a logon identifica-  
7       tion.

1           60. The metering system of claim 59 wherein  
2       the user identifying means implements biometrics recogni-  
3       tion.

1           61. The metering system of claim 59 wherein  
2       the user identifying means is a personal characteristic  
3       detector.

1           62. The metering system of claim 59 wherein  
2 the user identifying means periodically identifies the  
3 user.

1           63. The metering system of claim 59 wherein  
2 the data acquiring means passively acquires the usage  
3 data from a personal computer.

1           64. The metering system of claim 59 wherein  
2 the data acquiring means comprises software resident on a  
3 storage device of the interactive service device.

1           65. The metering system of claim 64 wherein  
2 the software comprises means for monitoring scrolling of  
3 a display and for including data related to the monitored  
4 scrolling in the usage data.

1           66. The metering system of claim 59 wherein  
2 the data acquiring means passively acquires the usage  
3 data from a personal computer which is arranged to share  
4 a monitor with a television.

1                   67. The metering system of claim 59 wherein  
2                   the data acquiring means passively acquires the usage  
3                   data from a non-personal-computer.

1                   68. The metering system of claim 59 wherein  
2                   the data acquiring means is coupled to a communication  
3                   input to the interactive service device by way of a tap-  
4                   ping device.

1                   69. The metering system of claim 59 wherein  
2                   the data acquiring means is coupled to a televi-  
3                   sion/internet input to the interactive service device.

1                   70. The metering system of claim 59 wherein  
2                   the data acquiring means includes means for grabbing  
3                   video frames.

1                   71. The metering system of claim 59 wherein  
2                   the data acquiring means passively acquires off-line  
3                   usage data.

1                   72. The metering system of claim 59 wherein  
2                   the data acquiring means passively acquires on-line usage  
3                   data.

1                   73. The metering system of claim 59 further  
2                   comprising data communicating means for communicating the  
3                   usage data to a remote facility by way of an on-line  
4                   service communication.

1                   74. The metering system of claim 59 further  
2                   comprising data communicating means for communicating the  
3                   usage data to a remote facility in real time.

1                   75. The metering system of claim 59 further  
2                   comprising data communicating means for communicating the  
3                   usage data to a remote facility by way of a phone call.

1                   76. The metering system of claim 59 further  
2                   comprising data communicating means for communicating the  
3                   usage data to a remote facility by way of cable.

1                   77. The metering system of claim 59 wherein  
2                   the data acquiring means is at a first statistically  
3                   selected facility, wherein the user identifying means is  
4                   at the first statistically selected facility, and wherein  
5                   the metering system further comprises:

6                   a plurality of other data acquiring means for  
7                   acquiring usage data relating to users' use of a plurali-

8 ty of other interactive service devices, wherein each of  
9 the other data acquiring means and a corresponding other  
10 interactive service device are located in a corresponding  
11 one of a plurality of other statistically selected facil-  
12 ities; and,

13 a plurality of other user identifying means for  
14 identifying, independently of a password and/or a logon  
15 identification, the user of a corresponding one of the  
16 other interactive service devices, wherein each of the  
17 other user identifying means is located in a correspond-  
18 ing one of the plurality of other statistically selected  
19 facilities.

1 78. A metering system comprising:  
2 data acquiring means for acquiring usage data  
3 from an interactive service device; and,  
4 data transmitting means for electronically  
5 transmitting the usage data to a remote facility.

1 79. The metering system of claim 78 wherein  
2 the interactive service device is a personal computer.

1                   80. The metering system of claim 78 wherein  
2 the interactive service device is a non-personal-comput-  
3 er.

1                   81. The metering system of claim 78 wherein  
2 the data acquiring means acquires off-line usage data.

1                   82. The metering system of claim 81 wherein  
2 the data acquiring means acquires on-line usage data.

1                   83. The metering system of claim 78 wherein  
2 the data acquiring means acquires on-line usage data.

1                   84. The metering system of claim 78 further  
2 comprising user identifying means for identifying a user  
3 independently of a password and/or a logon identifica-  
4 tion.

1                   85. The metering system of claim 84 wherein  
2 the user identifying means implements biometrics recogni-  
3 tion.

1                   86. The metering system of claim 84 wherein  
2 the user identifying means is a personal characteristic  
3 detector.

1                   87. The metering system of claim 78 wherein  
2 the data transmitting means electronically transmits the  
3 usage data to the remote facility by way of an on-line  
4 service communication.

1                   88. The metering system of claim 78 wherein  
2 the data transmitting transmits the usage data to the  
3 remote facility in real time.

1                   89. The metering system of claim 78 wherein  
2 the data transmitting means transmits the usage data to  
3 the remote facility by way of a phone call.

1                   90. The metering system of claim 78 wherein  
2 the data transmitting means transmits the usage data to  
3 the remote facility by way of cable.

1                   91. The metering system of claim 78 wherein  
2 the data acquiring means is at a first statistically  
3 selected facility, wherein the data transmitting means is



4 at the first statistically selected facility, and wherein  
5 the metering system further comprises:

6 a plurality of other data acquiring means for  
7 acquiring usage data from a plurality of other interac-  
8 tive service devices, wherein each of the other data  
9 acquiring means and a corresponding other interactive  
10 service device are located in a corresponding one of a  
11 plurality of other statistically selected facilities;  
12 and,

13 a plurality of other data transmitting means  
14 for electronically transmitting the usage data acquired  
15 by the other data acquiring means to the remote facility,  
16 wherein each of the other data communicating means is  
17 located in a corresponding one of the plurality of other  
18 statistically selected facilities.

1 92. A metering system comprising:

2 data acquiring means for acquiring usage data  
3 from an interactive service device, wherein the data  
4 acquiring means is downloaded from a remote facility;  
5 and,

6 data storing means for storing the data acquir-  
7 ing means and the usage data.

1           93. The metering system of claim 92 wherein  
2 the remote facility is a first remote facility, and wher-  
3 ein the metering system further comprises transmitting  
4 means for electronically transmitting the usage data to a  
5 second remote facility.

1           94. The metering system of claim 93 wherein  
2 the first and second remote facility are the same remote  
3 facility.

1           95. The metering system of claim 93 wherein  
2 the data acquiring means is at a first statistically  
3 selected facility, wherein the data storing means is at  
4 the first statistically selected facility, wherein the  
5 transmitting means is at the first statistically selected  
6 facility, and wherein the metering system further com-  
7 prises:

8           a plurality of other data acquiring means for  
9 acquiring usage data from a plurality of other interac-  
10 tive service devices, wherein each of the other data  
11 acquiring means is downloaded to a corresponding one of a  
12 plurality of other statistically selected facilities from  
13 the first remote facility, and wherein each of the other  
14 data acquiring means and a corresponding other interac-

15        tive service device are located in a corresponding one of  
16        the plurality of other statistically selected facilities;

17                a plurality of other data storing means for  
18        storing the usage data acquired by the other data acquir-  
19        ing means and for storing the other data acquiring means,  
20        wherein each of the other data storing means is located  
21        in a corresponding one of the plurality of other statis-  
22        tically selected facilities; and,

23                a plurality of other transmitting means for  
24        electronically transmitting the usage data stored by the  
25        other data storing means to the second remote facility,  
26        wherein each of the other transmitting means is located  
27        in a corresponding one of the plurality of other statis-  
28        tically selected facilities.

1                96. The metering system of claim 92 wherein  
2        the interactive service device is a personal computer.

1                97. The metering system of claim 92 wherein  
2        the interactive service device is a non-personal-comput-  
3        er.

1                98. The metering system of claim 92 wherein  
2        the data acquiring means acquires off-line usage data.

1                    99. The metering system of claim 92 wherein  
2 the data acquiring means acquires on-line usage data.

1                    100. The metering system of claim 92 further  
2 comprising a user identifying means for identifying a  
3 user independently of a password and/or a logon identifi-  
4 cation.

1                    101. The metering system of claim 100 wherein  
2 the user identifying means implements biometrics recogni-  
3 tion.

1                    102. The metering system of claim 100 wherein  
2 the user identifying means is a personal characteristic  
3 detector.

1                    103. The metering system of claim 92 further  
2 comprising data transmitting means for transmitting the  
3 usage data to a central facility through an on-line ser-  
4 vice communication.

1                    104. The metering system of claim 92 further  
2 comprising data transmitting means for transmitting the  
3 usage data to a central facility in real time.

1                   105. The metering system of claim 92 further  
2 comprising data transmitting means for transmitting the  
3 usage data to a central facility by way of a phone call.

1                   106. The metering system of claim 92 further  
2 comprising data transmitting means for transmitting the  
3 usage data to a central facility by way of cable.

1                   107. The metering system of claim 92 wherein  
2 the data acquiring means is at a first statistically  
3 selected facility, wherein the data storing means is at  
4 the first statistically selected facility, and wherein  
5 the metering system further comprises:

6                   a plurality of other data acquiring means for  
7 acquiring usage data from a plurality of other interac-  
8 tive service devices, wherein each of the other data  
9 acquiring means is downloaded to a corresponding one of a  
10 plurality of other statistically selected facilities from  
11 the remote facility, and wherein each of the other data  
12 acquiring means and a corresponding other interactive  
13 service device are located in a corresponding one of a  
14 plurality of other statistically selected facilities;  
15 and,

16           a plurality of other data storing means for  
17 storing the usage data acquired by the other data acquir-  
18 ing means and for storing the other data acquiring means,  
19 wherein each of the other data storing means is located  
20 in a corresponding one of the plurality of other statis-  
21 tically selected facilities.

1           108. A metering system comprising:  
2           communication line tapping means for tapping  
3 into a communication line coupled to an interactive ser-  
4 vice device; and,  
5           passive data acquiring means, coupled to the  
6 communication line tapping means, for passively acquiring  
7 usage data from communications on the communication line.

1           109. The metering system of claim 108 wherein  
2 the communication line tapping means taps into a phone  
3 line coupled to the interactive service device.

1           110. The metering system of claim 108 wherein  
2 the communication line tapping means taps into a local  
3 area network coupled to the interactive service device.

1           111. The metering system of claim 108 wherein  
2 the communication line tapping means taps into a video  
3 feed to the interactive service device.

1           112. The metering system of claim 108 wherein  
2 the communication line tapping means is a probe arranged  
3 to pick off a signal being processed by the interactive  
4 service device.

1           113. The metering system of claim 108 wherein  
2 the passive data acquiring means passively acquires the  
3 usage data from a vertical blanking interval of the video  
4 signal.

1           114. The metering system of claim 108 wherein  
2 the passive data acquiring means is arranged to passively  
3 acquire on-line usage data from communications on the  
4 communication line, wherein the passive data acquiring  
5 means includes software resident on the interactive ser-  
6 vice device, and wherein the software is arranged to  
7 passively acquire off-line usage data from the interac-  
8 tive service device.

1                   115. The metering system of claim 114 wherein  
2 the software is arranged to monitor scrolling of video  
3 displayed with respect to the interactive service device.

1                   116. The metering system of claim 114 wherein  
2 the passive data acquiring means includes means for grab-  
3 bing video frames.

1                   117. The metering system of claim 108 wherein  
2 the passive data acquiring means passively acquires the  
3 usage data from a personal computer.

1                   118. The metering system of claim 108 wherein  
2 the passive data acquiring means passively acquires the  
3 usage data from a non-personal-computer.

1                   119. The metering system of claim 108 wherein  
2 the passive data acquiring means passively acquires off-  
3 line usage data.

1                   120. The metering system of claim 108 wherein  
2 the passive data acquiring means passively acquires on-  
3 line usage data.



1                   121. The metering system of claim 108 further  
2 comprising user identifying means for identifying a user  
3 independently of a password and/or a logon identifica-  
4 tion.

1                   122. The metering system of claim 121 wherein  
2 the user identifying means implements biometrics recogni-  
3 tion.

1                   123. The metering system of claim 121 wherein  
2 the user identifying means is a personal characteristic  
3 detector.

1                   124. The metering system of claim 108 further  
2 comprising data communicating means for communicating the  
3 usage data to a remote facility through an on-line ser-  
4 vice communication.

1                   125. The metering system of claim 108 further  
2 comprising data communicating means for communicating the  
3 usage data to a remote facility in real time.

1            126. The metering system of claim 108 wherein  
2 the communication line tapping means is at a first sta-  
3 tistically selected facility, wherein the passive data  
4 acquiring means is at the first statistically selected  
5 facility, and wherein the metering system further com-  
6 prises:

7            a plurality of other communication line tapping  
8 means for tapping into a plurality of communication  
9 lines, wherein each of the other communication line tap-  
10 ping means is coupled to a corresponding one of the com-  
11 munication lines which is coupled to a corresponding one  
12 of a plurality of other interactive service devices, and  
13 wherein each of the other communication line tapping  
14 means and a corresponding other interactive service de-  
15 vice are located in a corresponding one of the plurality  
16 of other statistically selected facilities; and,

17           a plurality of other passive data acquiring  
18 means for passively acquiring usage data from communica-  
19 tions on the plurality of communication lines, wherein  
20 each of the other passive data acquiring means and a  
21 corresponding other interactive service device are locat-  
22 ed in a corresponding one of the plurality of other sta-  
23 tistically selected facilities.

1                   127. A metering system comprising:  
2                   data acquiring means for acquiring usage data  
3                   from an interactive service device, wherein the data  
4                   acquiring means includes code detecting means for detect-  
5                   ing an identification code in content being processed by  
6                   the interactive service device; and,  
7                   data storing means for storing the usage data  
8                   and the identification code.

1                   128. The metering system of claim 127 wherein  
2                   the content being processed by the interactive service  
3                   device is an application program being executed by the  
4                   interactive service device.

1                   129. The metering system of claim 127 wherein  
2                   the content being processed by the interactive service  
3                   device is an on-line service communication received by  
4                   the interactive service device.

1                   130. The metering system of claim 127 wherein  
2                   the identification code is in video content being pro-  
3                   cessed by the interactive service device.

1           131. The metering system of claim 127 wherein  
2 the identification code is in audio content being pro-  
3 cessed by the interactive service device.

1           132. The metering system of claim 127 wherein  
2 the identification code is in graphics being processed by  
3 the interactive service device.

1           133. The metering system of claim 127 wherein  
2 the data acquiring means passively acquires the usage  
3 data from the interactive service device.

1           134. The metering system of claim 133 wherein  
2 the data acquiring means comprises communication line  
3 tapping means for tapping into a communication line cou-  
4 pled to an interactive service device, and wherein the  
5 code detecting means detects the identification code from  
6 the communications on the communication line.

1           135. The metering system of claim 133 wherein  
2 the data acquiring means comprises a probe arranged to  
3 pick off a signal being processed by the interactive  
4 service device, and wherein the code detecting means  
5 detects the identification code from the signal picked  
6 off by the probe.

1           136. The metering system of claim 133 wherein  
2 the data acquiring means is coupled to receive a video  
3 output of the interactive service device, and wherein the  
4 code detecting means detects the identification code from  
5 the video output.

1           137. The metering system of claim 133 wherein  
2 the data acquiring means is coupled to receive an audio  
3 output of the interactive service device, and wherein the  
4 code detecting means detects the identification code from  
5 the audio output.

1           138. The metering system of claim 127 wherein  
2 the data acquiring means comprises software resident on a  
3 storage device of the interactive service device.

1           139. The metering system of claim 138 wherein  
2 the software is arranged to monitor scrolling of video  
3 displayed with respect to the interactive service device.

1           140. The metering system of claim 127 further  
2 comprising user identifying means for identifying a user  
3 independently of a password and/or a logon identifica-  
4 tion.

1           141. The metering system of claim 140 wherein  
2 the user identifying means implements biometrics recogni-  
3 tion.

1           142. The metering system of claim 140 wherein  
2 the user identifying means is a personal characteristic  
3 detector.

1           143. The metering system of claim 127 further  
2 comprising data communicating means for communicating the  
3 usage data to a remote facility through an on-line ser-  
4 vice communication.

1           144. The metering system of claim 127 further  
2 comprising data communicating means for communicating the  
3 usage data to a remote facility in real time.

1           145. The metering system of claim 127 wherein  
2 the data acquiring means is at a first statistically  
3 selected facility, wherein the data storing means is at  
4 the first statistically selected facility, and wherein  
5 the metering system further comprises:

6           a plurality of other data acquiring means for  
7 acquiring usage data from a plurality of other interac-  
8 tive service devices, wherein each of the other data  
9 acquiring means includes a corresponding code detecting  
10 means for detecting an identification code in content  
11 being processed by a corresponding one of the other in-  
12 teractive service device, and wherein each of the other  
13 data acquiring means and a corresponding other interac-  
14 tive service device are located in a corresponding one of  
15 a plurality of other statistically selected facilities;  
16 and,

17           a plurality of other data storing means for  
18 storing the usage data acquired by the other data acquir-  
19 ing means, wherein each of the other data storing means

20 is located in a corresponding one of the plurality of  
21 other statistically selected facilities.

1 146. A metering system comprising:  
2 passive data acquiring means for passively  
3 acquiring usage data from a personal computer; and,  
4 data communicating means for electronically  
5 communicating the usage data to a remote facility.

1 147. The metering system of claim 146 wherein  
2 the passive data acquiring means comprises software resi-  
3 dent on a storage device of the personal computer.

1 148. The metering system of claim 147 wherein  
2 the software comprises means for monitoring scrolling of  
3 a display and for including data related to the monitored  
4 scrolling in the usage data.

1 149. The metering system of claim 147 wherein  
2 the software comprises means for detecting an identifica-  
3 tion code in content being processed by the personal  
4 computer.



1           150. The metering system of claim 147 wherein  
2 the software comprises means for employing pattern match-  
3 ing in order to recognize content being processed by the  
4 personal computer.

1           151. The metering system of claim 146 further  
2 comprising user identifying means for identifying a user  
3 of the personal computer independently of a password  
4 and/or a logon identification.

1           152. The metering system of claim 151 wherein  
2 the user identifying means implements biometrics recogni-  
3 tion.

1           153. The metering system of claim 151 wherein  
2 the user identifying means is a personal characteristic  
3 detector.

1           154. The metering system of claim 151 wherein  
2 the passive data acquiring means comprises means for  
3 detecting an identification code in content being pro-  
4 cessed by the personal computer.

1                   155. The metering system of claim 146 wherein  
2                   the passive data acquiring means comprises means for  
3                   monitoring on-line usage.

1                   156. The metering system of claim 146 wherein  
2                   the passive data acquiring means comprises means for  
3                   monitoring off-line usage.

1                   157. The metering system of claim 146 wherein  
2                   the passive data acquiring means comprises means for  
3                   detecting an identification code in content being pro-  
4                   cessed by the personal computer.

1                   158. The metering system of claim 146 wherein  
2                   the passive data acquiring means is at a first statisti-  
3                   cally selected facility, wherein the data communicating  
4                   means is at the first statistically selected facility,  
5                   and wherein the metering system further comprises:

6                   a plurality of other passive data acquiring  
7                   means for passively acquiring usage data from a plurality  
8                   of other personal computers, wherein each of the other  
9                   passive data acquiring means and a corresponding other  
10                  personal computer are located in a corresponding one of a

11 plurality of other statistically selected facilities;  
12 and,

13 a plurality of other data communicating means  
14 for communicating the usage data acquired by the other  
15 data acquiring means to the remote facility, wherein each  
16 of the other data communicating means is located in a  
17 corresponding one of the plurality of other statistically  
18 selected facilities.

1 159. A metering system comprising:  
2 communication line tapping means for tapping  
3 into a communication line coupled to a non-personal-com-  
4 puter;

5 passive data acquiring means, coupled to the  
6 communication line tapping means, for passively acquiring  
7 usage data from the non-personal-computer;

8 data storing means for storing the usage data  
9 acquired by the passive data acquiring means; and,

10 data communicating means for communicating the  
11 usage data to a remote facility.

1                   160. The metering system of claim 159 further  
2 comprising software resident in an EEPROM in the non-  
3 personal-computer, and wherein the software is arranged  
4 to acquire off-line usage data.

1                   161. The metering system of claim 160 wherein  
2 the software is arranged to monitor scrolling of a dis-  
3 play and for including data related to the monitored  
4 scrolling in the off-line usage data.

1                   162. The metering system of claim 159 further  
2 comprising software downloaded to an EEPROM in the non-  
3 personal-computer, and wherein the software is arranged  
4 to acquire off-line usage data.

1                   163. The metering system of claim 159 further  
2 comprising a plug-in software routine of a web browser on  
3 the non-personal-computer.

1           164. The metering system of claim 159 wherein  
2 the passive data acquiring means comprises means for  
3 detecting an identification code in content being pro-  
4 cessed by the non-personal-computer.

1           165. The metering system of claim 159 wherein  
2 the passive data acquiring means comprises means for  
3 acquiring on-line usage data.

1           166. The metering system of claim 159 further  
2 comprising user identifying means for identifying a user  
3 of the non-personal-computer independently of a password  
4 and/or a logon identification.

1           167. The metering system of claim 166 wherein  
2 the user identifying means implements biometrics recogni-  
3 tion.

1           168. The metering system of claim 166 wherein  
2 the user identifying means is a personal characteristic  
3 detector.

1           169. The metering system of claim 159 wherein  
2 the communication line tapping means is at a first sta-

3       tistically selected facility, wherein the passive data  
4       acquiring means is at the first statistically selected  
5       facility, wherein the data storing means is at the first  
6       statistically selected facility, wherein the data commu-  
7       nicating means is at the first statistically selected  
8       facility, and wherein the metering system further com-  
9       prises:

10               a plurality of other communication line tapping  
11       means for tapping into a plurality of communication  
12       lines, wherein each of the other communication line tap-  
13       ping means is coupled to a corresponding one of the com-  
14       munication lines which is coupled to a corresponding one  
15       of a plurality of other non-personal-computers, and wher-  
16       ein each of the other communication line tapping means  
17       and a corresponding other non-personal-computer are lo-  
18       cated in a corresponding one of a plurality of other  
19       statistically selected facilities;

20               a plurality of other passive data acquiring  
21       means for passively acquiring usage data from the plural-  
22       ity of other non-personal-computers, wherein each of the  
23       other passive data acquiring means and a corresponding  
24       other non-personal-computer are located in a correspond-  
25       ing one of the plurality of other statistically selected  
26       facilities;

27           a plurality of other data storing means for  
28 storing the usage data acquired by the other passive data  
29 acquiring means, wherein each of the other data storing  
30 means is located in a corresponding one of the plurality  
31 of other statistically selected facilities; and,

32           a plurality of other data communicating means  
33 for communicating the usage data stored by the other data  
34 storing means to the remote facility, wherein each of the  
35 other data communicating means is located in a cor-  
36 responding one of the plurality of other statistically  
37 selected facilities.

1           170. A metering system comprising:  
2           passive data acquiring means for passively  
3 acquiring usage data from an Internet television;  
4           data storing means for storing the usage data  
5 acquired by the passive data acquiring means; and,  
6           data communicating means for communicating the  
7 usage data to a remote facility.

1           171. The metering system of claim 170 wherein  
2 the passive data acquiring means comprises a frame grab-  
3 ber.

1           172. The metering system of claim 171 wherein  
2 the passive data acquiring means comprises means for  
3 reading a vertical blanking interval of a frame grabbed  
4 by the frame grabber.

1           173. The metering system of claim 171 wherein  
2 the passive data acquiring means comprises means for  
3 detecting an identification code in frames grabbed by the  
4 frame grabber.

1           174. The metering system of claim 171 wherein  
2 the passive data acquiring means acquires on-line usage  
3 data from frames grabbed by the frame grabber.

1           175. The metering system of claim 170 wherein  
2 the passive data acquiring means acquires an identifica-  
3 tion code in content communicated Internet television.

1           176. The metering system of claim 170 wherein  
2 the passive data acquiring means acquires on-line usage  
3 data from content communicated to the Internet televi-  
4 sion.



1                   177. The metering system of claim 170 further  
2                   comprising user identifying means for identifying a user  
3                   of the television independently of a password and/or a  
4                   logon identification.

1                   178. The metering system of claim 177 wherein  
2                   the user identifying means implements biometrics recogni-  
3                   tion.

1                   179. The metering system of claim 177 wherein  
2                   the user identifying means is a personal characteristic  
3                   detector.

1                   180. The metering system of claim 170 wherein  
2                   the data communicating means electronically communicates  
3                   the usage data to the remote facility.

1                   181. The metering system of claim 170 wherein  
2                   the passive data acquiring means is coupled to a communi-  
3                   cation input to the Internet television by way of a tap-  
4                   ping device.

1                   182. The metering system of claim 181 wherein  
2                   the communication input is a phone line.

1                   183. The metering system of claim 181 wherein  
2 the communication input is a video input.

1                   184. The metering system of claim 183 wherein  
2 the video input is an input for receiving a video signal  
3 having an NTSC format, and wherein the passive data ac-  
4 quiring means comprises a frame grabber arranged to grab  
5 frames from the video signal.

1                   185. The metering system of claim 181 wherein  
2 the communication input is an input for receiving comput-  
3 er graphics, and wherein the passive data acquiring means  
4 comprises a frame grabber arranged to grab frames from  
5 the computer graphics.

1                   186. The metering system of claim 170 wherein  
2 the passive data acquiring means is at a first statisti-  
3 cally selected facility, wherein the data storing means  
4 is at the first statistically selected facility, wherein  
5 the data communicating means is at the first statisti-  
6 cally selected facility, and wherein the metering system  
7 further comprises:

8                   a plurality of other passive data acquiring  
9 means for passively acquiring usage data from a plurality

10 of other Internet televisions, wherein each of the other  
11 passive data acquiring means and a corresponding other  
12 Internet television are located in a corresponding one of  
13 a plurality of other statistically selected facilities;  
14 a plurality of other data storing means for  
15 storing the usage data acquired by the other passive data  
16 acquiring means, wherein each of the other data storing  
17 means is located in a corresponding one of the plurality  
18 of other statistically selected facilities; and,  
19 a plurality of other data communicating means  
20 for communicating the usage data stored by the other data  
21 storing means to the remote facility, wherein each of the  
22 other data communicating means is located in a cor-  
23 responding one of the plurality of other statistically  
24 selected facilities.

1 187. A metering system comprising:  
2 usage data acquiring means for passively ac-  
3 quiring usage data from an interactive service device;  
4 television ratings data acquiring means for ac-  
5 quiring ratings data relating to the tuning of television  
6 signals by a television; and,  
7 data communicating means for communicating the  
8 usage data and the ratings data to a remote facility.

1           188. The metering system of claim 187 wherein  
2           the interactive service device is the television, and  
3           wherein the usage data acquiring means acquires usage  
4           data relating to on-line usage by way of the television.

1           189. The metering system of claim 187 wherein  
2           the usage data acquiring means comprises a frame grabber.

1           190. The metering system of claim 189 wherein  
2           the usage data acquiring means comprises means for de-  
3           tecting an identification code in frames grabbed by the  
4           frame grabber.

1           191. The metering system of claim 189 wherein  
2           the usage data acquiring means comprises means for em-  
3           ploying pattern matching in order to recognize content in  
4           frames grabbed by the frame grabber.

1           192. The metering system of claim 189 wherein  
2           the usage data acquiring means acquires on-line usage  
3           data from frames grabbed by the frame grabber.

1           193. The metering system of claim 187 wherein  
2           the usage data acquiring means comprises means for de-

3        tecting an identification code in content being processed  
4        by the television.

1                194. The metering system of claim 187 wherein  
2        the usage data acquiring means comprises means for moni-  
3        toring on-line usage by way of the television.

1                195. The metering system of claim 187 further  
2        comprising user identifying means for identifying a user  
3        of the television independently of a password and/or a  
4        logon identification.

1                196. The metering system of claim 195 wherein  
2        the user identifying means implements biometrics recogni-  
3        tion.

1                197. The metering system of claim 195 wherein  
2        the user identifying means is a personal characteristic  
3        detector.

1                198. The metering system of claim 187 wherein  
2        the data communicating means electronically communicates  
3        the usage data and the ratings data to the remote facili-  
4        ty.

1                    199. The metering system of claims 187 wherein  
2 the television ratings data acquiring means comprises  
3 identification code reading means for reading program  
4 identification codes from television signals tuned by a  
5 television.

1                    200. The metering system of claims 187 wherein  
2 the television ratings data acquiring means comprises  
3 signature extracting means for extracting signatures from  
4 television signals tuned by a television.

1                    201. The metering system of claims 187 wherein  
2 the television ratings data acquiring means comprises;  
3                    identification code reading means for reading  
4 program identification codes from television signals  
5 tuned by a television; and,  
6                    signature extracting means for extracting sig-  
7 natures from television signals tuned by the television.

1                    202. The metering system of claim 187 wherein  
2 the usage data acquiring means acquires off-line usage  
3 data from the interactive service device.

1                   203. The metering system of claim 187 wherein  
2 the usage data acquiring means is at a first statistical-  
3 ly selected facility, wherein the television ratings data  
4 acquiring means is at the first statistically selected  
5 facility, wherein the data communicating means is at the  
6 first statistically selected facility, and wherein the  
7 metering system further comprises:

8                   a plurality of other usage data acquiring means  
9 for passively acquiring usage data from a plurality of  
10 other interactive service devices, wherein each of the  
11 other usage data acquiring means and a corresponding  
12 other interactive service device are located in a corre-  
13 sponding one of a plurality of other statistically se-  
14 lected facilities;

15                  a plurality of other television ratings data  
16 acquiring means for acquiring ratings data relating to  
17 the tuning of television signals by a plurality of other  
18 televisions, wherein each of the other television ratings  
19 data acquiring means and a corresponding other television  
20 are located in a corresponding one of the plurality of  
21 other statistically selected facilities;

22                  a plurality of other data communicating means  
23 for communicating the usage data and ratings data ac-  
24 quired by the other usage data acquiring means and the

25 other television ratings data acquiring means to the  
26 remote facility, wherein each of the other data communi-  
27 cating means is located in a corresponding one of the  
plurality of other statistically selected facilities.

1 204. The metering system of claim 187 wherein  
2 the television from which the television ratings data is  
acquired is a conventional television.

1 205. The metering system of claim 187 wherein  
2 the television from which the television ratings data is  
acquired is an Internet television.

1 206. The metering system of claim 187 wherein  
2 the television from which the television ratings data is  
acquired is a computer having a television tuner.

1 207. A metering system comprising:  
2 data acquiring means for acquiring usage data  
3 from a video signal received by a video display device,  
4 wherein the data acquiring means employs pattern matching  
5 to acquire the usage data; and,  
data storing means for storing the usage data.



1                   208. The metering system of claim 207 wherein  
2 the video display device is a television, and wherein the  
3 data acquiring means acquires the usage data from the  
video signal at a video input of the television.

1                   209. The metering system of claim 207 wherein  
2 the video display device is a television, and wherein the  
3 data acquiring means acquires the usage data from the  
video signal at a video output of the television.

1                   210. The metering system of claim 207 wherein  
2 the video display device is a television, and wherein the  
3 data acquiring means acquires the usage data from a probe  
arranged to pick up a signal of the television.

1                   211. The metering system of claim 210 wherein  
the probe is non-intrusive.

1                   212. The metering system of claim 210 wherein  
the probe is at a video output of the television.

1                   213. The metering system of claim 210 wherein  
the probe is at a video input of the television.

1                   214. The metering system of claim 207 wherein  
2 the data acquiring means acquires on-line usage data from  
the video display device.

1                   215. The metering system of claim 207 wherein  
the data acquiring means comprises a frame grabber.

1                   216. The metering system of claim 215 wherein  
2 the data acquiring means implements pattern matching to  
3 recognize an identification code in frames grabbed by the  
4 frame grabber and includes the identification code in the  
usage data.

1                   217. The metering system of claim 215 wherein  
2 the data acquiring means implements pattern matching to  
3 recognize on-line service content from frames grabbed by  
4 the frame grabber and includes the on-line service con-  
tent in the usage data.

1                   218. The metering system of claim 207 wherein  
2 the data acquiring means implements pattern matching to  
3 recognize an identification code from the video signal  
4 received by the video display device and includes the  
identification code in the usage data.

1                   219. The metering system of claim 207 wherein  
2 the data acquiring means implements pattern matching to  
3 recognize on-line service content from the video signal  
4 received by the video display device and includes the on-  
line service content in the usage data.

1                   220. The metering system of claim 207 wherein  
2 the data acquiring means includes means for reading an  
3 identification code from the video signal received by the  
4 video display device and includes the identification code  
in the usage data.

1                   221. The metering system of claim 207 further  
2 comprising user identifying means for identifying a user  
3 of the video display device independently of a password  
and/or a logon identification.

1                   222. The metering system of claim 221 wherein  
2 the user identifying means implements biometrics recogni-  
tion.

1                   223. The metering system of claim 221 wherein  
2 the user identifying means is a personal characteristic  
detector.

1                   224. The metering system of claim 207 wherein  
2 the data acquiring means is at a first statistically  
3 selected facility, wherein the data storing means is at  
4 the first statistically selected facility, and wherein  
5 the metering system further comprises:

6                   a plurality of other data acquiring means for  
7 acquiring usage data from video signals received by a  
8 plurality of other video display devices, wherein the  
9 other data acquiring means employ pattern matching to ac-  
10 quire usage data, wherein each of the other data acquir-  
11 ing means and a corresponding other video display device  
12 are located in a corresponding one of a plurality of  
13 other statistically selected facilities; and,

14                  a plurality of other data storing means for  
15 storing the usage data acquired by the other data acquir-  
16 ing means, wherein each of the other data storing means  
17 is located in a corresponding one of the plurality of  
other statistically selected facilities.

1                   225. A method of collecting and integrating  
2 usage data from a plurality of facilities comprising the  
3 following steps:

4                   a) collecting first usage data from a plurali-  
5 ty of end users;

6                   b) collecting second usage data from a plural-  
7                   ity of content providers; and,

8                   d) integrating the first and second usage  
data.

1                   226. The method of claim 225 wherein the end  
users are in residential facilities.

1                   227. The method of claim 225 wherein the end  
users are in commercial facilities.

1                   228. The method of claim 225 wherein the end  
2                   users are in residential facilities and commercial facil-  
ities.

1                   229. The method of claim 225 wherein step a)  
2                   comprises the step of electronically collecting the first  
3                   usage data from local area networks of a plurality of end  
users.

1                   230. The method of claim 225 wherein the con-  
tent providers are on-line service providers.

1                   231. The method of claim 225 wherein the con-  
tent providers are web sites.

1                   232. The method of claim 225 wherein step a)  
2 comprises the step of electronically collecting first  
3 usage data from a plurality of end users, wherein step b)  
4 comprises the step of electronically collecting second  
usage data from a plurality of content providers.

1                   233. A metering system comprising:  
2 passive data acquiring means for passively  
3 acquiring usage data from an interactive service device;  
4 and,  
data storing means for storing the usage data.

1 / 11

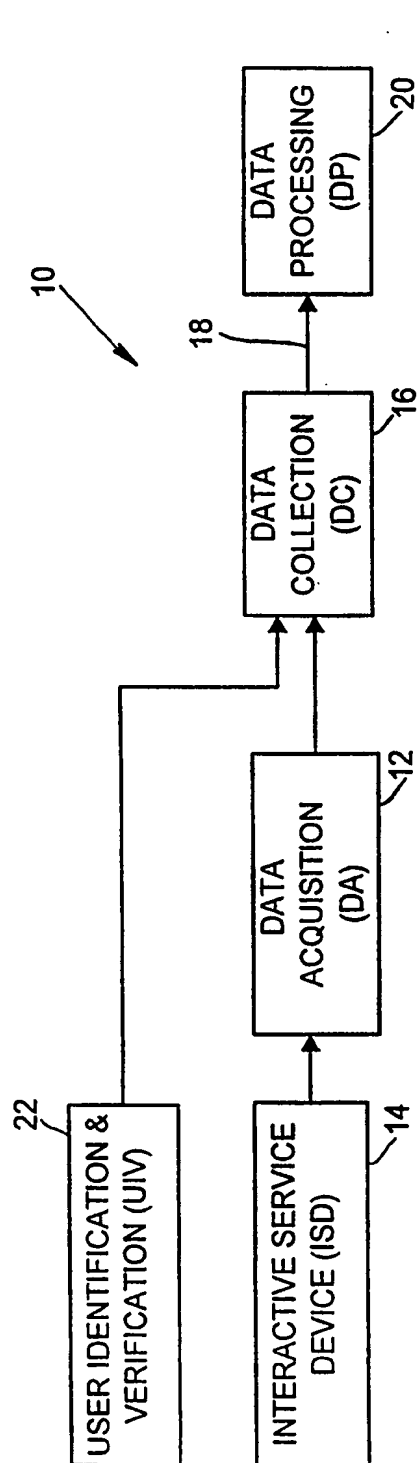


FIGURE 1

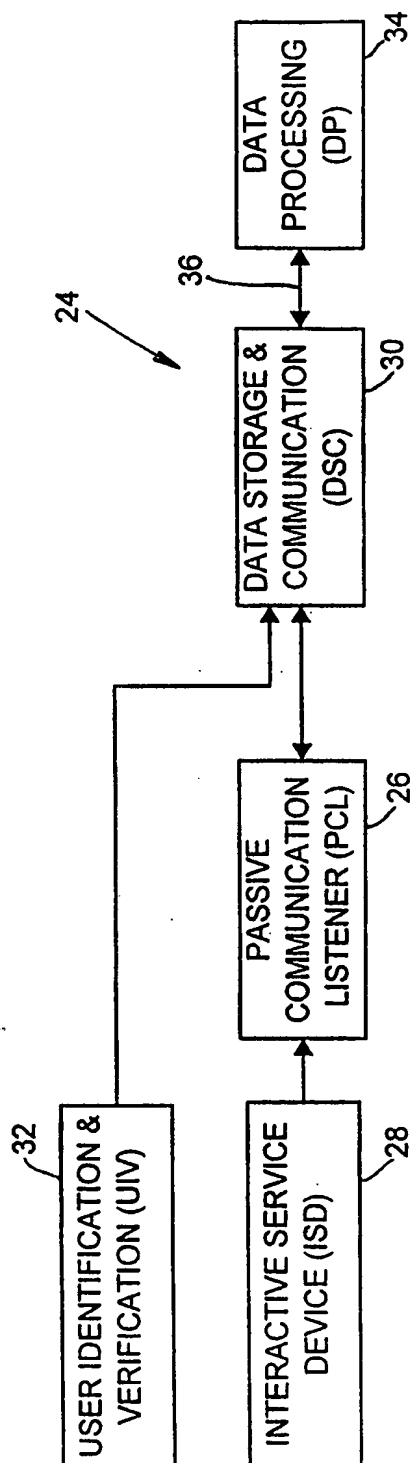


FIGURE 2

2 / 11

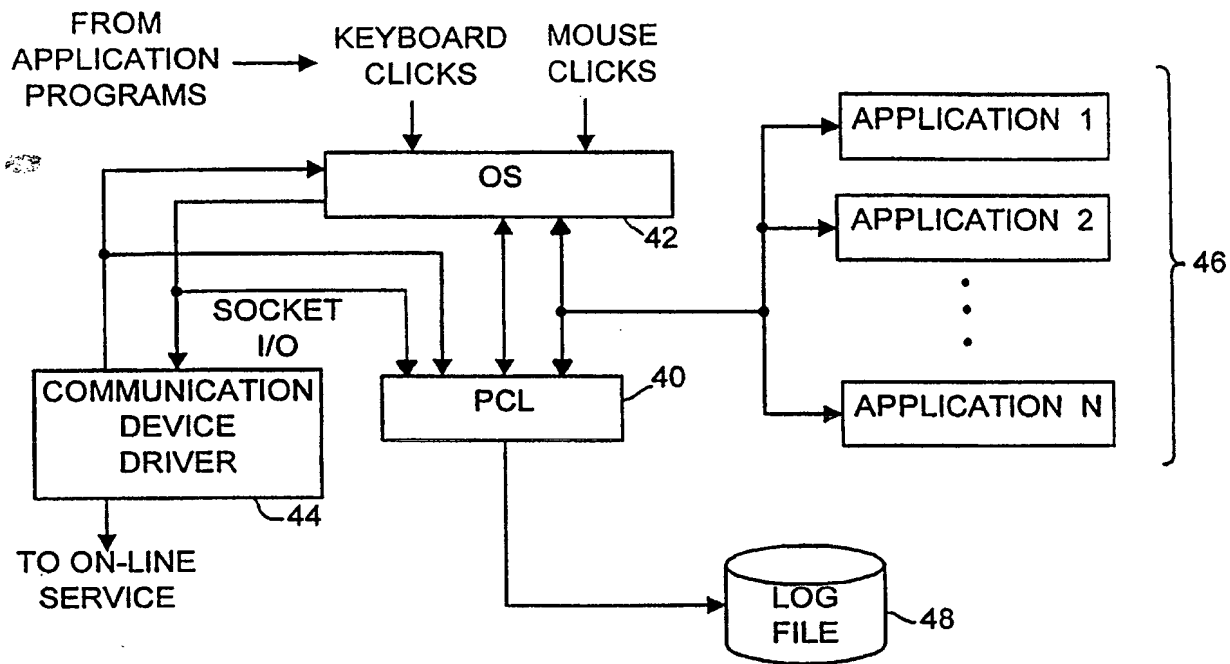


FIGURE 3

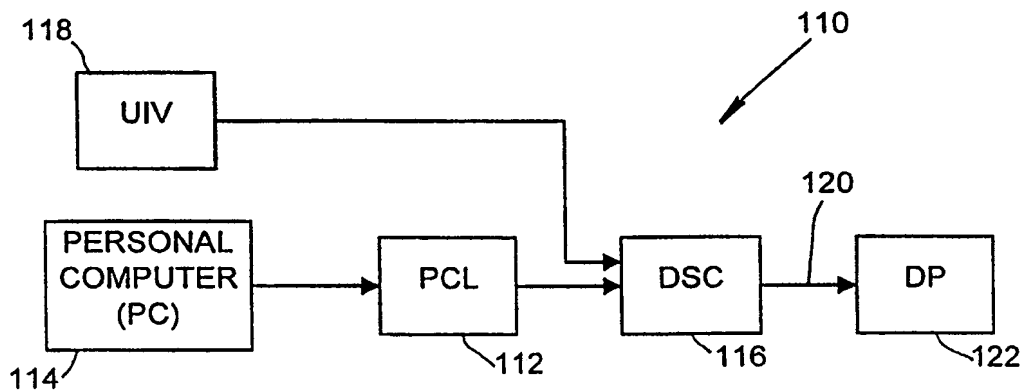


FIGURE 6



3 / 11

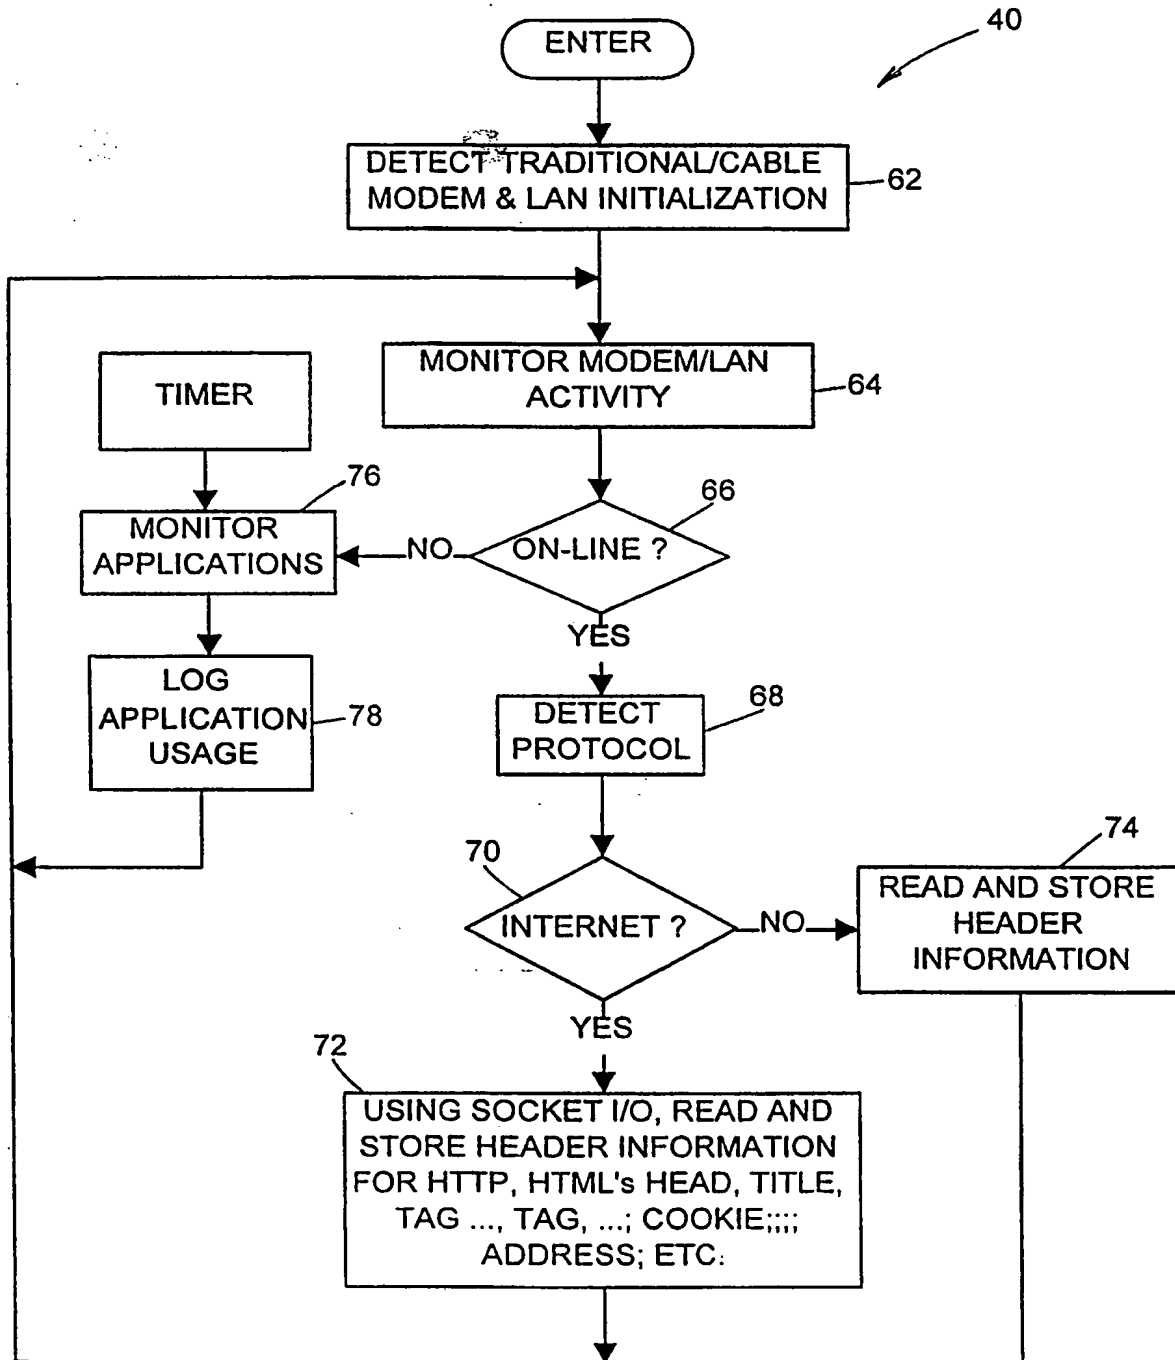


FIGURE 4

4 / 11

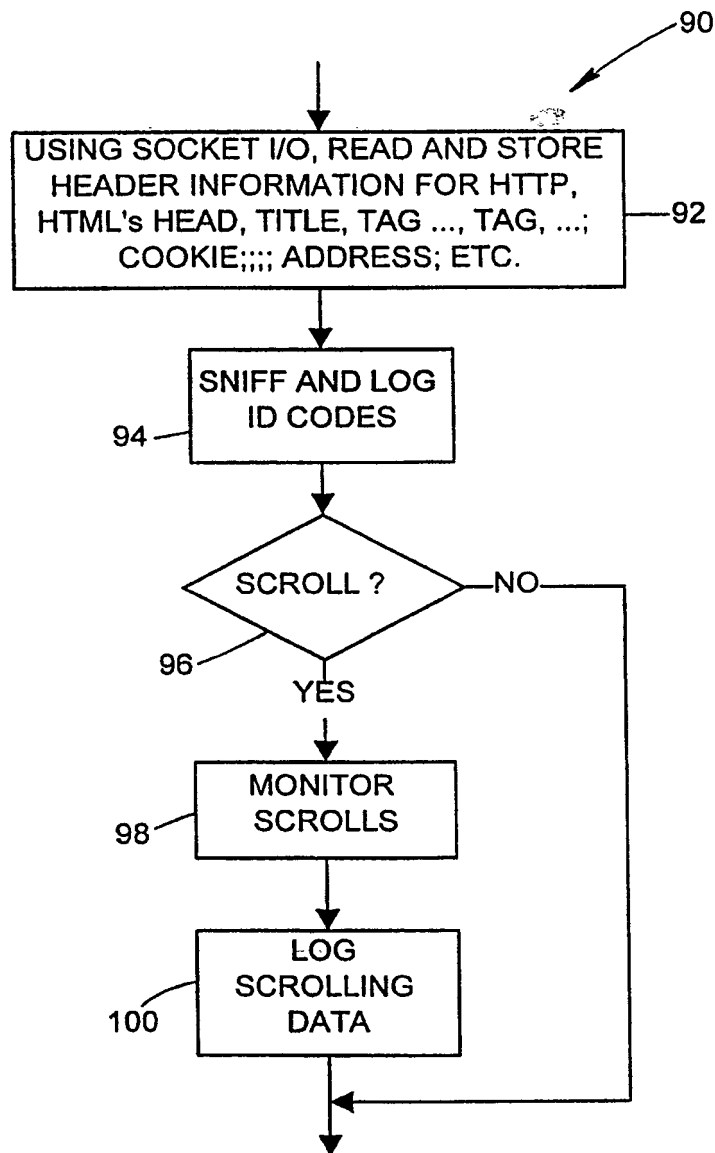


FIGURE 5

5 / 11

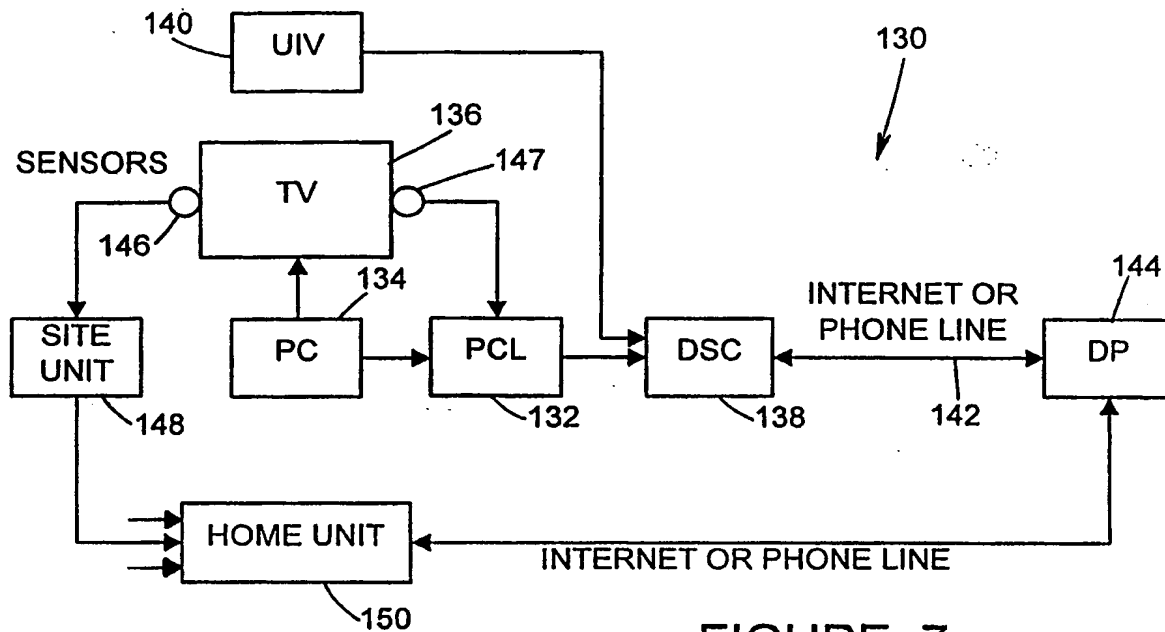


FIGURE 7

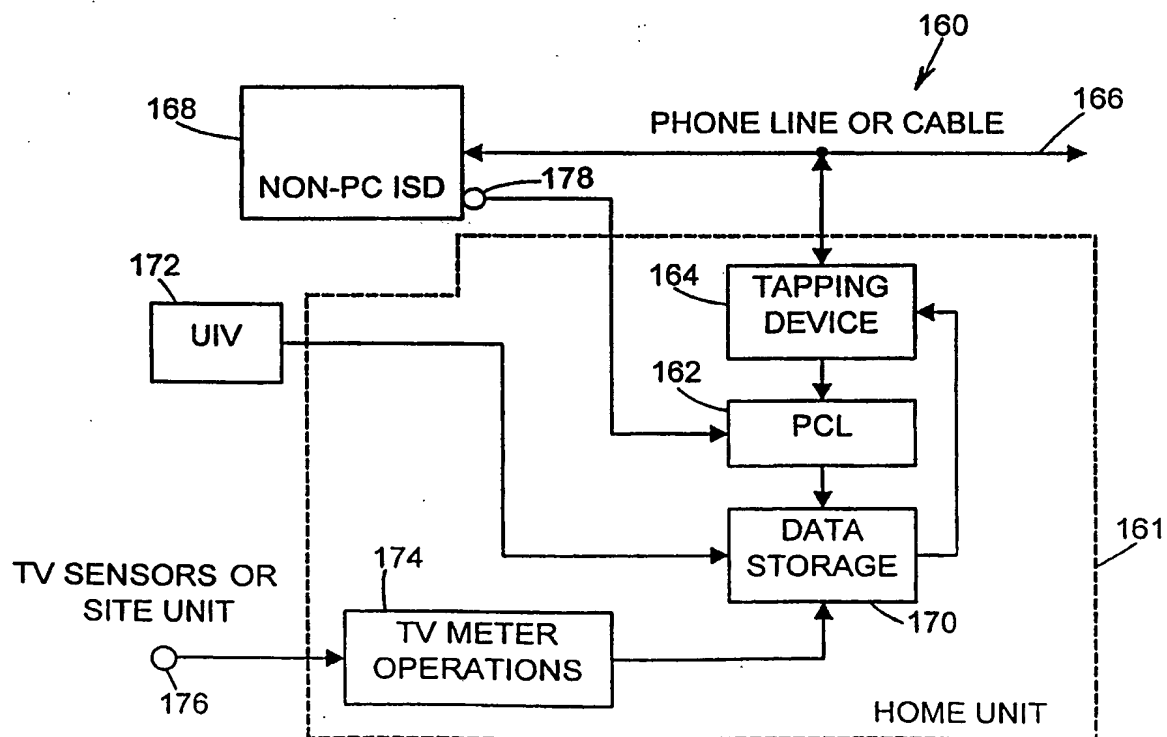


FIGURE 8

6 / 11

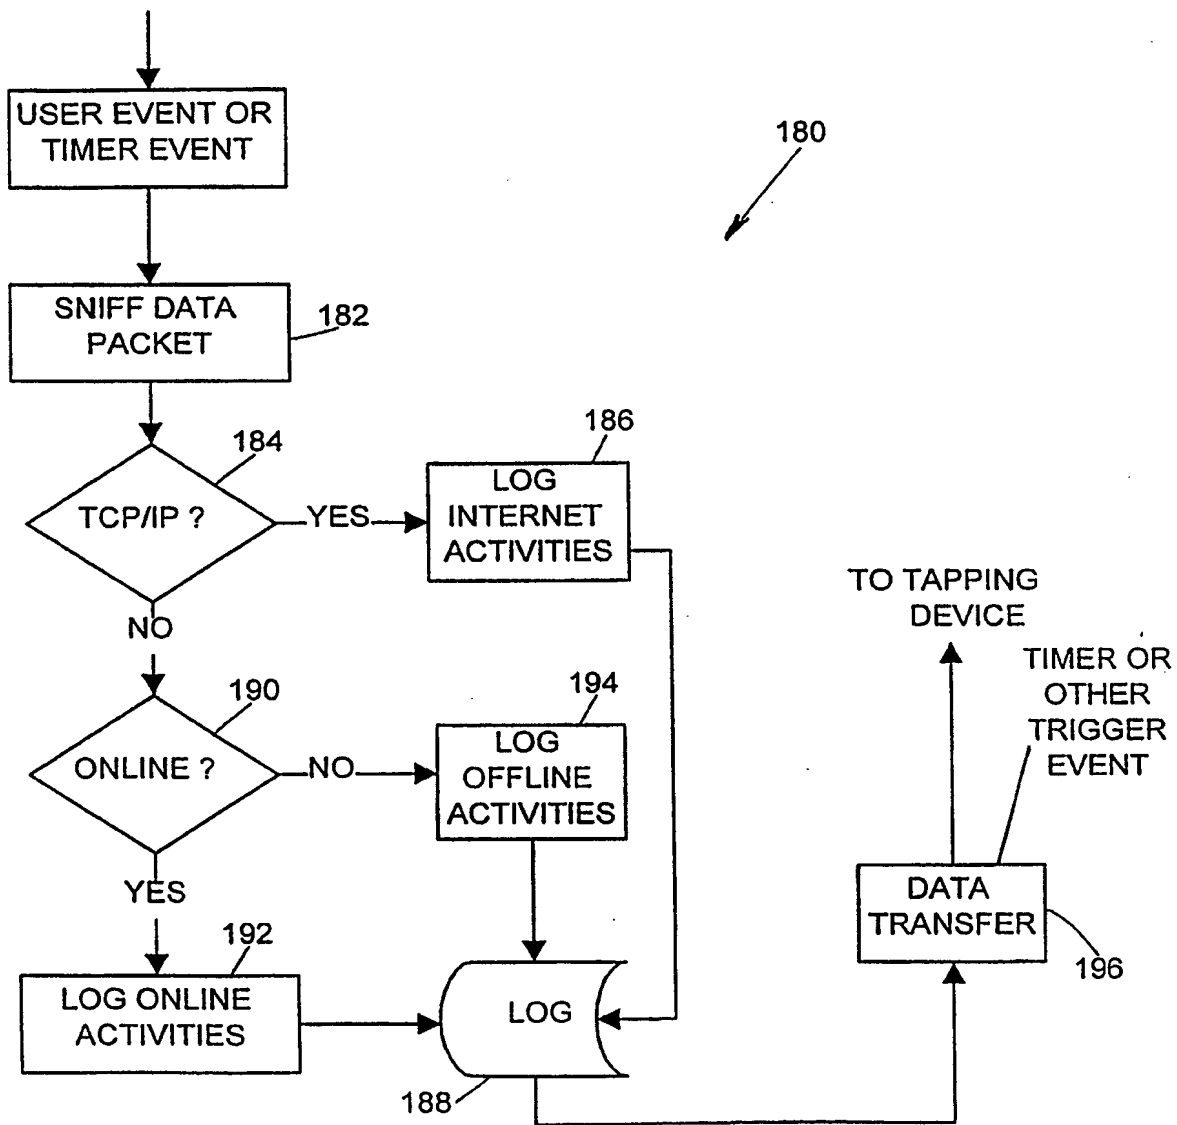


FIGURE 9

7 / 11

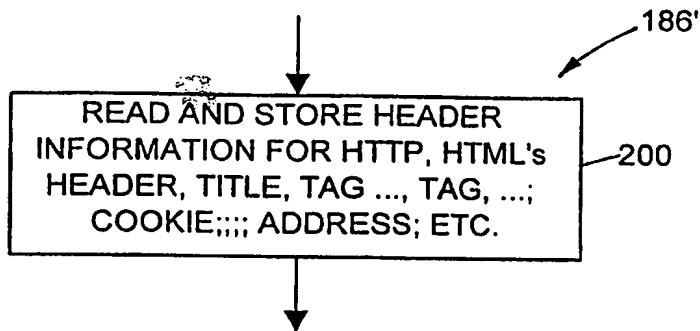


FIGURE 10

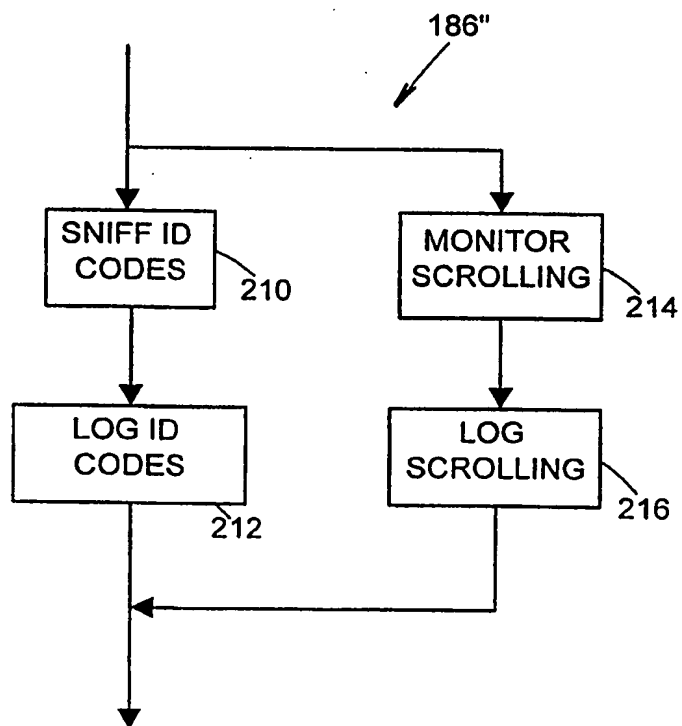


FIGURE 11

8 / 11

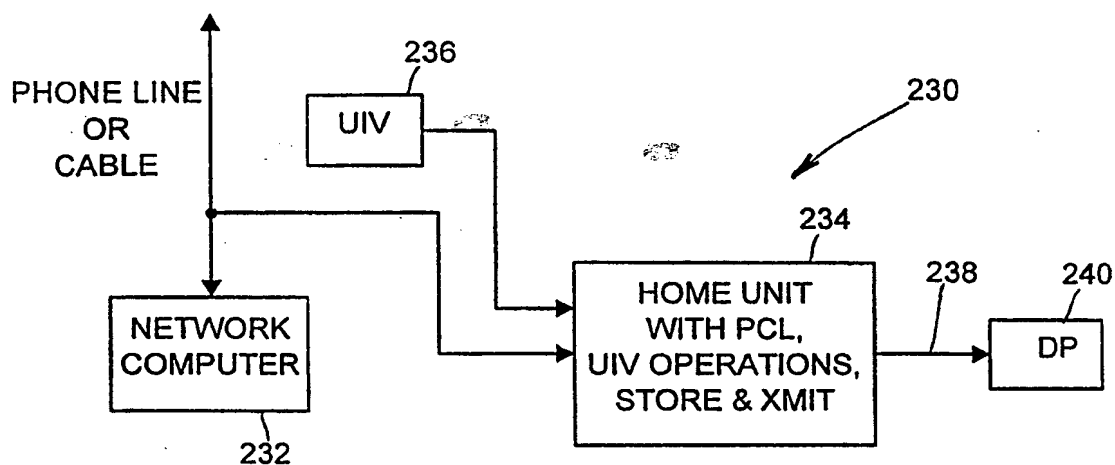


FIGURE 12

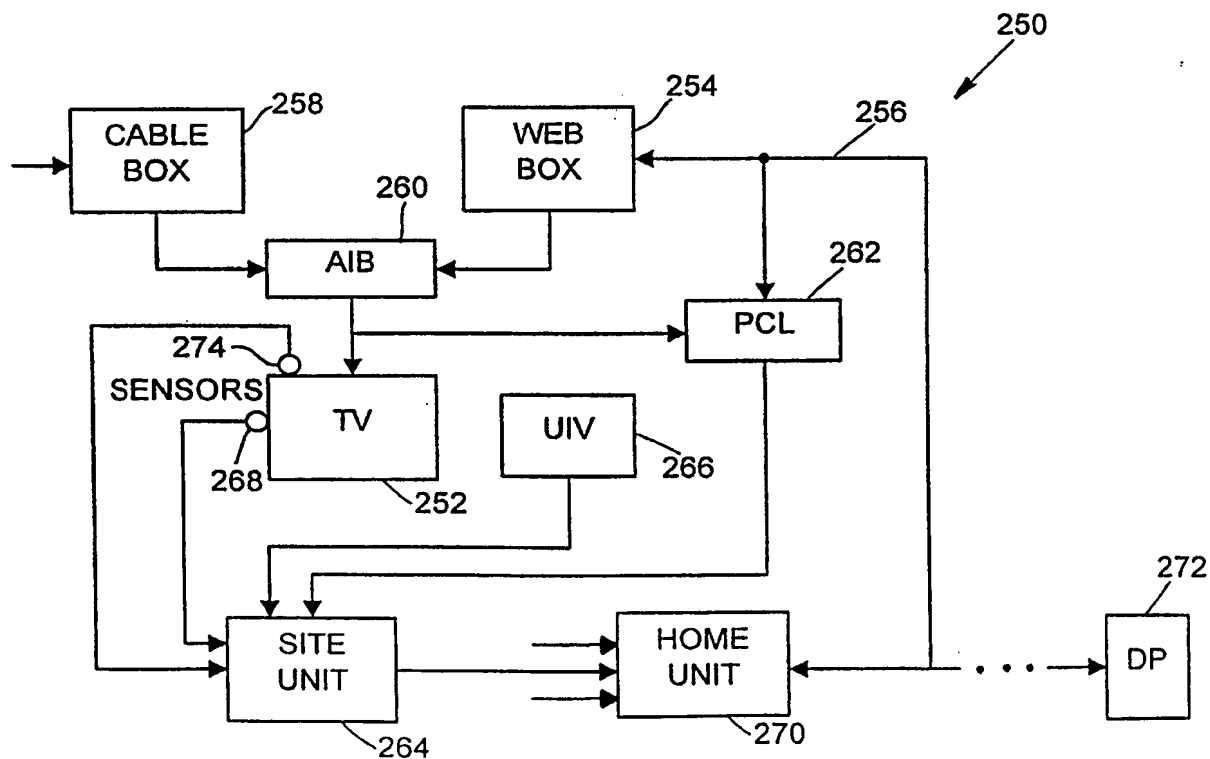


FIGURE 13

9 / 11

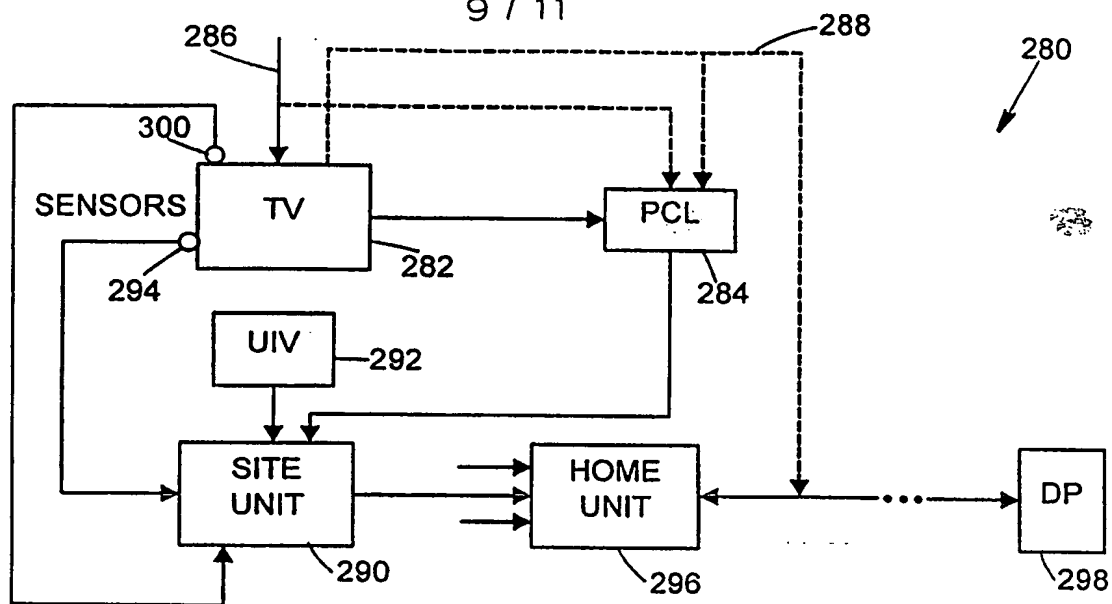


FIGURE 14

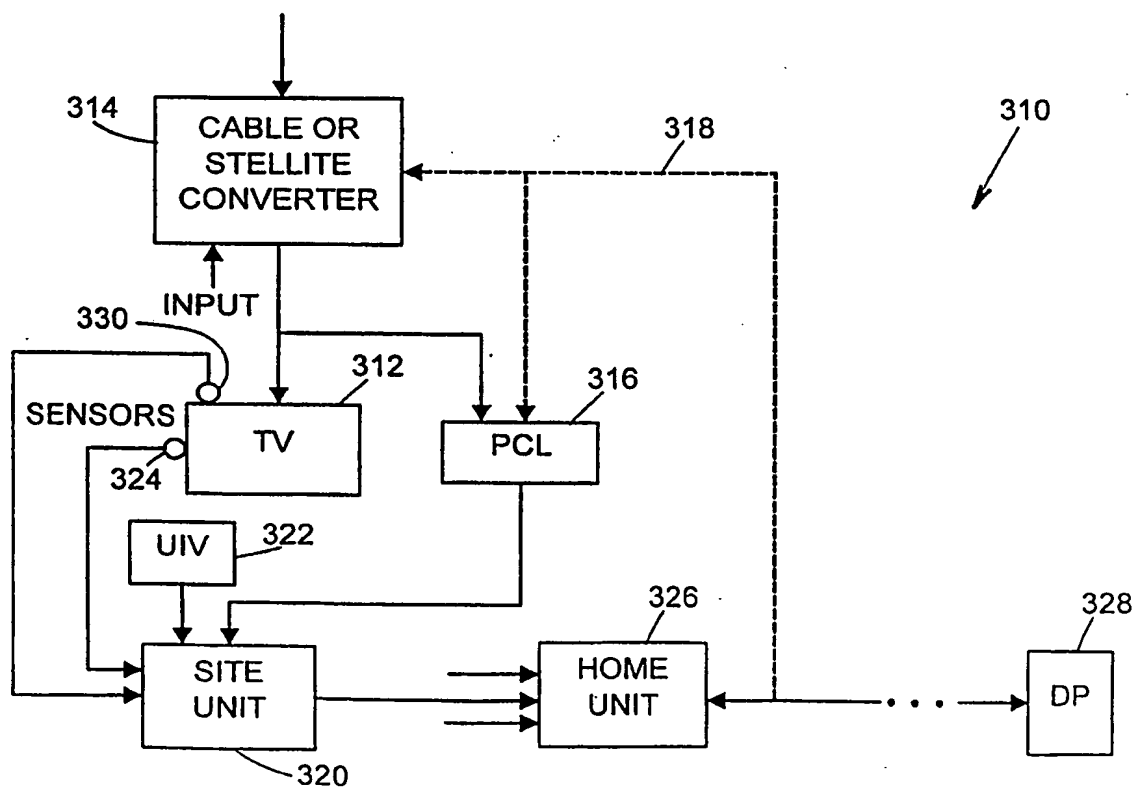


FIGURE 15

SUBSTITUTE SHEET (RULE 26)

10 / 11

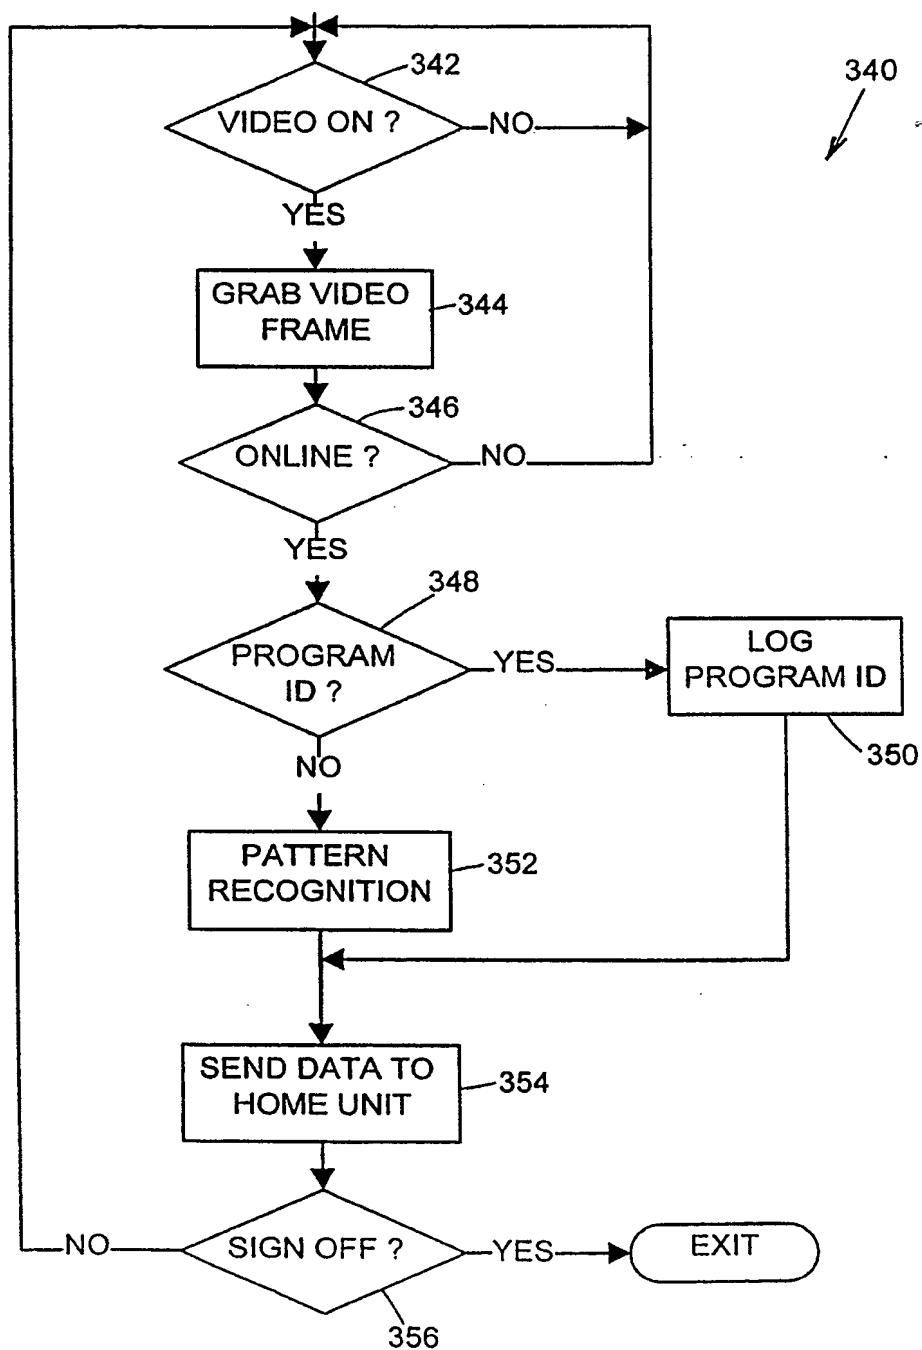


FIGURE 16



11 / 11

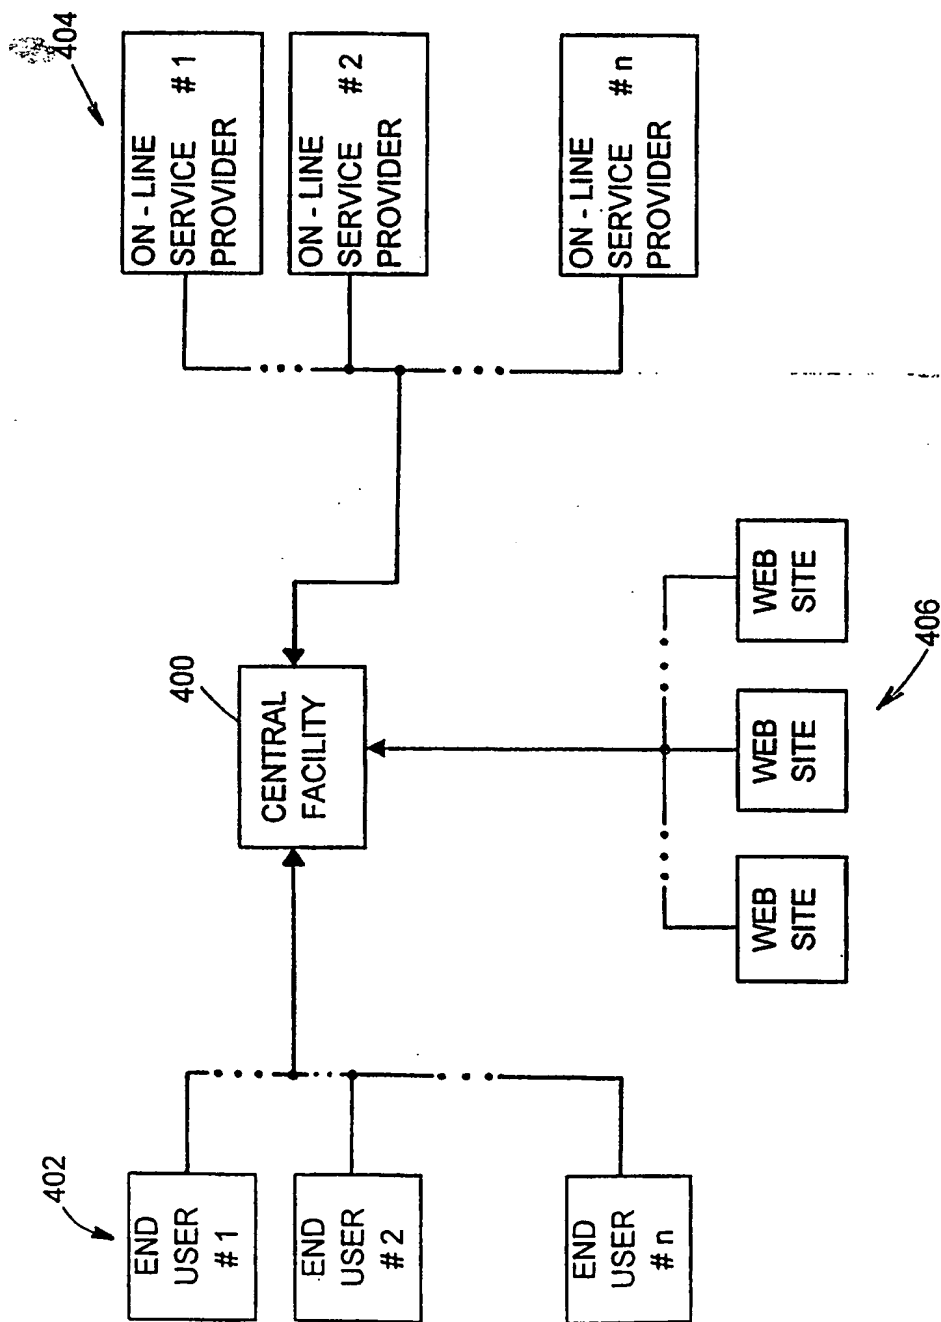


FIGURE 17

**THIS PAGE BLANK (USPTO)**